


DATA SHEET

TMI-Orion

NanoVACQ Temperature FullRadio

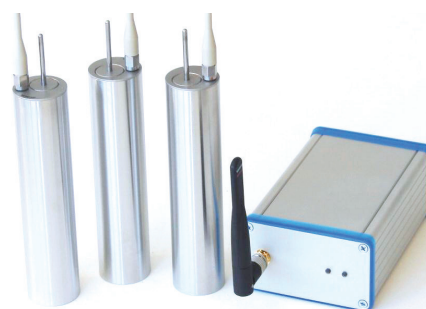

Real time wireless temperature measurement inside processes.

NanoVACQ Temperature FullRadio is a data logger with one to three sensors; some models are watertight under pressure up to 30 bar.

Its ruggedness allows temperature measurement in harsh industrial environments.

There are many models available, answering most industrial needs. The models vary by the number and type of probes, temperature operating range, and battery capacity.

NanoVACQ Temperature FullRadio is equipped with a 2.4 GHz radio transceiver as the unique communication interface. In addition to its data logger functionalities, it is designed for remote set up and radio data transmission, in real time or after the process, through a TMI-Orion radio transceiver connected to a PC. The PC is equipped with the Qlever software platform for logger setup and process data collection, management and display.

METROLOGY

Operating range	Batteries	Resolution	Uncertainty**
From -55°C ^(*) to +140°C	Radio-HE	$\pm 0.04\text{ }^{\circ}\text{C}$	+/- 0.1°C from -80°C to +140°C (+/- 0.05°C upon request)
From -90°C to +85°C	014ZFL		

(*) -90°C under certain conditions.

(**) The specified uncertainties correspond to two standard deviations. The uncertainties are calculated taking into account the various significant error sources, including the calibration probes, the equipment, the environmental conditions, the influence of the logger, repeatability, etc...

Each logger can be calibrated and adjusted at the temperature points corresponding to the user's needs.



TECHNICAL SPECIFICATIONS

Model	Number of channels	Probe type	Probe dimensions	Water tightness	ATEX compliant
NanoVACQ FullRadio 1Tc	1	Rigid (316L SS)	D. 3 mm, L. up to 200 mm or D. hybrid 3 > 1.9 mm, L. 30 mm	●	
NanoVACQ FullRadio 2Tc	2	Rigid (316L SS)	D. 3 mm, L. up to 200 mm or D. hybrid 3 > 1.9 mm, L. 30 mm	●	
NanoVACQ FullRadio 1Td	1	Semi-rigid (316L SS)	D. 2 mm, L. from 60 mm to 1150 mm	●	
	1	1 rigid tip at the end of 1 flexible probe (Teflon®)	D.3 mm, L. from 30 to 100 mm D. from 2.2 to 5 mm, L. from 100 to 1000 mm	●	
	1	1 rigid tip at the end of 1 flexible probe (Viton®)	D.3 mm, L. from 20 to 100 mm D.5 mm, L. from 100 to 1000 mm		
NanoVACQ FullRadio 2Td	2	Semi-rigid (316L SS)	D. 2 mm, L. from 60 mm to 1150 mm	●	
	2	2 rigid tips at the end of 2 flexible probes (Teflon®)	D.3 mm, L. from 30 to 100 mm D. from 2.2 to 5 mm, L. from 100 to 1000 mm	●	
	2	2 rigid tips at the end of 2 flexible probes (Viton®)	D.3 mm, L. from 20 to 100 mm D.5 mm, L. from 100 to 1000 mm		
NanoVACQ FullRadio 3Td	3	Semi-rigid (316L SS)	D. 2 mm, L. from 60 mm to 1150 mm	●	
	3	3 rigid tips at the end of 3 flexible probes (Viton®)	D.3 mm, L. from 20 to 100 mm D.5 mm, L. from 100 to 1000 mm		
	3	3 rigid tips at the end of 3 flexible probes (Teflon®)	D.3 mm, L. from 30 to 100 mm D. from 2.2 to 5 mm, L. from 100 to 1000 mm	●	
NanoVACQ FullRadio 1Tdi	1	1 connector (Fischer Connectors®)	Interchangeable probes specifications according to customer request		
NanoVACQ FullRadio 2Tdi	2	2 connectors (Fischer Connectors®)			
NanoVACQ FullRadio 1Tc-1Td	2	1 rigid (316L SS) 1 semi-rigid (316L SS)	D. 3 mm, L. 30 mm or D. hybrid 3>1,9 mm, L.30 mm D. 2 mm, L. de 100 mm à 1000 mm	●	
	2	1 rigid (316L SS) 1 rigid tip at the end of 1 flexible probe (Viton®)	D. 3 mm, L. 30 mm or D. hybrid 3>1,9 mm, L.30 mm D. 3 mm, L.20 to 100 mm D.5 mm, L. 100 mm to 1000 mm		
	2	1 rigid (316L SS) 1 rigid tip at the end of 1 flexible probe (Teflon®)	D. 3 mm, L. 30 mm or D. hybrid 3>1,9 mm, L.30 mm D. 3 mm, L.30 to 100 mm D. from 2.2 to 5 mm, L. 100 mm to 1000 mm	●	
	2	1 rigid (316L SS) 1 rigid tip at the end of 1 flexible probe (Viton®)	D. 3 mm, L. 30 mm or D. hybrid 3>1,9 mm, L.30 mm D. 3 mm, L.30 to 100 mm D. from 2.2 to 5 mm, L. 100 mm to 1000 mm	●	
NanoVACQ FullRadio 1Tc-2Td	3	1 rigid (316L SS) 2 semi rigid (316L SS)	D. 3 mm, L. up to 200 mm or D. hybrid 3 > 1.9 mm, L. 30 mm D. 2 mm, L. from 100 mm to 1000 mm	●	
	3	1 rigid (316L SS) 2 rigid tips at the end of 2 flexible probes (Viton®)	D.3 mm, L. up to 200 mm or D. hybrid 3 > 1.9 mm, L. 30 mm D.3 mm, L. 20-100 mm D.5 mm, L. from 100 to 1000 mm		
	3	1 rigid (316L SS) 2 rigid tips at the end of 2 flexible probes (Teflon®)	D.3 mm, L. up to 200 mm or D. hybrid 3 > 1.9 mm, L. 30 mm D.3 mm, L. 30 to 100 mm D. from 2.2 to 5 mm, L. from 100 to 1000 mm	●	
NanoVACQ FullRadio 1Tc-2Tdi	3	1 rigid (316L SS) 2 connectors (Fischer Connectors®)	D. 3 mm, L. up to 200 mm or D. hybrid 3 > 1.9 mm, L. 30 mm According to customer request		

TECHNICAL SPECIFICATIONS

Material	Logger body: 316L Stainless steel	
Dimensions of the body	With battery RADIO-HE	D.31 mm x H.52.2 mm
	With battery 014ZFL	D.31 mm x H.129 mm
Temperature sensor	Pt 1000 or Pt 100	
Memory capacity	48 000 acquisitions divided by number of measurement channels	
Memory capacity with BigMemory	294 500 acquisitions divided by number of measurement channels	
Acquisition rate	Programmable: minimum 1 second, maximum 59 minutes and 59 seconds	
Program duration	Programmable: days, hours, minutes	
Recording	Programmable start: by date, hour, minute or on temperature threshold	
Power	User replaceable battery pack	
Connectivity	2.4 GHz bidirectional radio transceiver and embedded 2.4 GHz radio transceiver module	
Connectable antenna models for NanoVACQ Temperature FullRadio (*)	Standard	length 49 mm, medium range - line of sight: 25 meters
	Short	length 25 mm, short range - line of sight: 15 meters
	Long	length 79 mm, long range - line of sight: 30 meters
	Remote	see catalog for accessories and options

(*) A preliminary test is recommended to validate the hertzian transmission in the user's application.

FUNCTIONS

- Radio set up, start and reading of data
- 2.4 GHz bidirectional radio communication
- Radio transceiver set up: transmission duration and rate (1 per hour to 1 per second)
- Start set up: immediate or delayed
- Memory set up: stop at maximum capacity/loop writing
- Real time or after the fact radio data transmission
- Time stamped measurement data
- Battery level alert with Qlever software



NanoVACQ 1Tc FullRadio, short antenna




NanoVACQ 1Tc FullRadio, standard antenna



NanoVACQ 1Td FullRadio with Teflon probe



NanoVACQ 3Td FullRadio with Teflon probes

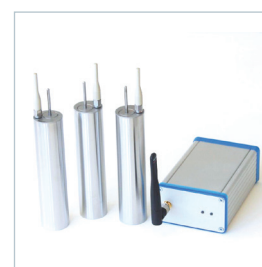

NanoVACQ 1Tc FullRadio for freezing processes and TMI-Orion radio transceiver

Examples of NanoVACQ Temperature FullRadio models



RADIO-FREQUENCY COMMUNICATION

- 2.4 GHz ISM band (frequency range 2.405 GHz to 2.475 GHz) / Can be used without license / Universal band for industrial, scientific and medical devices with low radio transmission power / Maximum radiated power +5 dBm (3,2 mW).
- Radio transmission range depends on the environment.
- TMI-Orion 2.4 GHz bidirectional radio protocol, based on IEEE 802.15.4 standard / 14 RF channels for the user / Able to manage several pieces of equipment connected in star configuration in the same space.

AUTONOMY

The NanoVACQ Temperature FullRadio is powered by a battery pack; its autonomy depends on the environment and the operational conditions of the application (extreme temperatures, radio range, electromagnetic disturbances, data acquisition and transmission rate).

As a result of the variety of environments and operational conditions, TMI-Orion does not guaranty the battery lifetime and recommends that the user determine the battery lifetime according to his own process conditions and experience.

SOFTWARE AND RELATED PRODUCTS

NanoVACQ Temperature FullRadio is used with Qlever software platform and a TMI-Orion radio transceiver.

Qlever software platform: data acquisition, management and visualization of data from TMI-Orion data loggers. Qlever is installed on a PC and operates under Windows®Vista/7/8/10. Data transmission and visualization are done after the industrial process or in real time.

TMI-Orion radio transceiver: this transmitting device connects to the PC in order to ensure radio link with the NanoVACQ Temperature FullRadio. Several antennas are available to optimize radio communications in the operational environment.

DELIVERABLES

The NanoVACQ Temperature FullRadio solution usually includes the following items:

- The NanoVACQ Temperature FullRadio data logger with a battery pack
- A TMI-Orion radio transceiver (to be ordered separately)
- The NanoVACQ Temperature FullRadio calibration certificate
- The NanoVACQ Temperature FullRadio configuration and calibration file
- Qlever software (to be ordered separately)
- A case for storage and transport (optional - to be ordered separately)

SERVICES

Maintenance: TMI-Orion recommends annual preventative maintenance and calibration service for the replacement of o-rings, functional checking, calibration and adjustment.

Accessories: The battery packs, engineered by TMI-Orion, are replaceable by the user and are referenced in our products list.

Headquarters: TMI-Orion S.A.
Parc Bellegarde - Bâtiment A
1, chemin de Borie
34170 Castelnau-le-Lez - France
T.: +33 (0)4 99 52 67 10 – F.: +33 (0)4 99 52 67 19



USA : TMI-USA, Inc.
11491 Sunset Hills Road, Suite 310
Reston, VA 20190 - USA
T : +1 703 668 0114 – F : +1 703 668 0118