

MARATHON PRODUCTS

3C\TEMP-USB-200C™

Digital Dual Sensor Thermal Temperature Data Logger for cryogenic industrial and remote monitoring applications.


The **3C\TEMP-USB -200C** is a reliable and cost-effective digital temperature recorder for all industrial and commercial applications. It has one sensor for ambient range temperatures inside the case, and one external RTD stainless-steel probe that monitors temperatures from -200°C (-328°F) up to +300°C (+572°F). It is ideal for monitoring all of your cryogenic stem cells and biologic materials. NFC capable model also available.

These high-precision laboratory-grade products will operate up to 2 years without a battery change. The LCD display provides real time viewing of ambient and remote temperature prior to downloading to a computer.

Small Form Factor: The internal firmware is user programmable and provides the following features: start time delay, sampling intervals, high and low alarm window values, recording status, and measurement data.

Visual Alarms: All our data loggers can be programmed with alarm limits. Should the temperature reach levels outside these limits, the LCD will display "ALARM." To start the recorder, simply press the start button!

Computer Ready: Marathon's easy-to-use MaxiThermal2 software is available for Microsoft Windows 7, 8, 8.1 & 10. Simply plug the unit into a standard USB port on your PC. The MaxiThermal2 software and USB cable are available separately. NFC enabled version available.

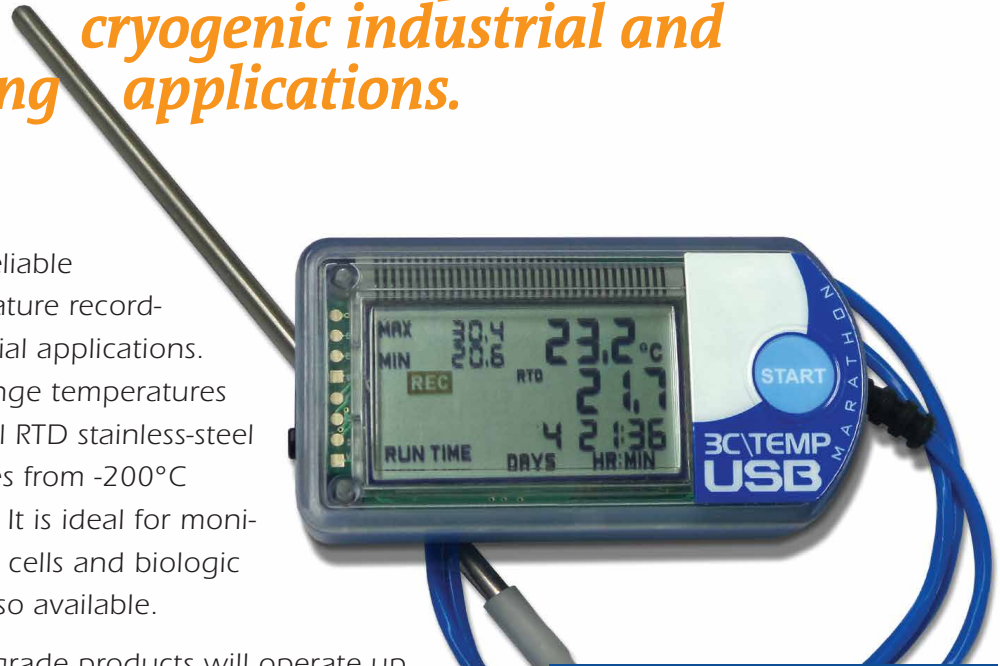

Temperature Range

Internal Sensor:

-29°C to +72°C

External probe:

-200°C to +300°C

Temperature Accuracy:

(NIST-traceable)

±0.5°C at center of range

±1.0°C at extremes

Memory EEPROM, Storage


8k per sensor

MARATHON



PRODUCTS, INC. *Don't ship without us!®*


MaxiThermal2 Software Highlights: Easy-to-use software provides clear graphs. Report Summary & Statistics File Manager, Note Attachment, Zoom, Elapsed Time or Date/Time View, Recorded View, Celsius or Fahrenheit. Data can be exported to other Windows programs such as spreadsheets, word-processing or databases. Available for Windows 7, 8, 8.1 and 10. An Enterprise Software version and 21 CFR Part 11 Compliant Software are available.

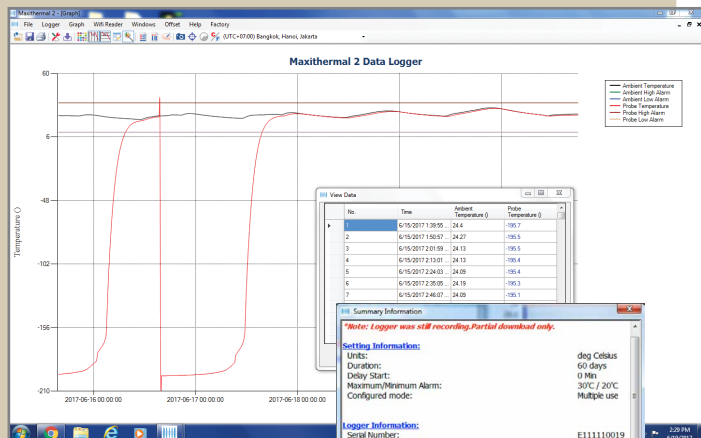

MaxiThermal2 Temperature Plots and Summary Information window.

3CTEMP-USB -200C SKU #7065 3CTEMP-USB -200C NFC Enabled SKU #7066 SPECIFICATIONS

- Memory EEPROM, Storage: 8k memory
- Internal Sensor: Wired chip in glass thermistor
- Operating Range: -29°C to +72°C / -20°F to +161°F
- Accuracy: ±0.2°C from 0° to +10°C / ±1.5°C at extremes (NIST-traceable)
- External Probe: RTD Stainless Steel Tip = 12 cm / 4.75 in.; Flexible Teflon-coated Cable = 61 cm / 24 in.
- Operating Range: -200°C to +300°C / -328°F to +572°F
- Accuracy: ±2.0°C / ±3.6°F (NIST-traceable)
- Measurement Intervals: User programmable from 2 seconds to months.
- High and low alarm limits: LED indicator
- Computer Interface: Mini USB connector
- Internal Firmware Provides: Internal Clock, Start time, Interval, User description, Alarm values, Recording status, Measurement data, Firmware version, Serial number, Model type.
- Power Source: CR2450 Battery
- Battery Life: 2 year operating life. 3 year shelf life.
- Size: Length 6.7 cm (2.5 in.) Width 3.5 cm (1.3 in.) Depth 0.9 cm (0.35 in.)
- Weight: 33 g (1.16 oz.)
- Water-resistant/Splashproof: The product package is hermetically sealed to an IP66 rating.
- CE Certified: Yes
- Warranty: 12 months
- Required Accessories: MaxiThermal2 software
Standard A to Mini B USB cable

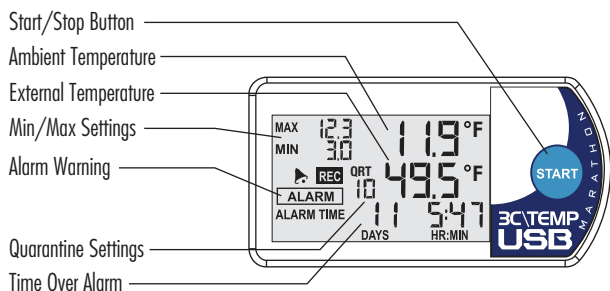

Please call 1-510-562-6450
for more information or to place an order.

www.marathonproducts.com

14500 Doolittle Drive, San Leandro, CA 94577 ▪ jnakagawa@marathonproducts.com
Specifications subject to change without prior notice.