

# AGL SERIES

## Large Aperture Ground Fault Relays


AGL Series are large aperture ground fault relays that offer one of the largest aperture diameters in the industry while maintaining a compact overall profile. Intended for sensing earth leakage in applications up to 300 A, the AGL Series offers a choice of N.O. or N.C. latching relays or an SPDT Form C relay with auto-reset. Case features integral DIN rail mounting as standard and optional noise immunity coatings for applications in harsh EMI/RFI environments.



### Ground Fault Protection Applications

- Replace bulky two-piece sensor solutions which require separate CTs or relay modules.
- Use with shunt trip breakers to provide total ground fault protection to sensitive machine electronics.
- Detect ground faults in resistance/impedance heating, industrial automation and control, theatrical lighting, portable power distribution, and snow melt/heat trace applications.
- Sense progressive levels of ground fault in motors or heating systems to detect deterioration prior to catastrophic failure.

#### Moisture Ingress on a Submersible Pump Motor

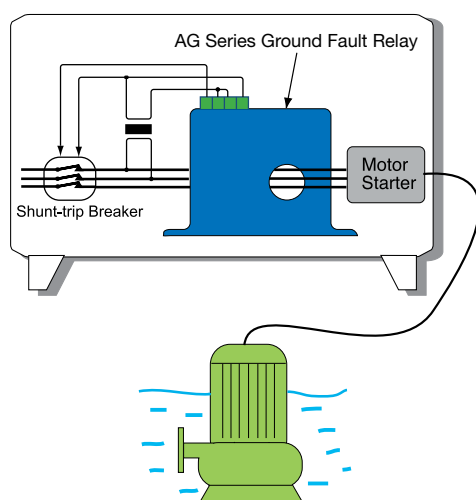

- For additional Application Examples, go to [www.nktechnologies.com/applications](http://www.nktechnologies.com/applications)

**OEMs**

#### Test & Evaluation Units for OEMs

Free program expedites evaluation process. See page 1 for details.





### Ground Fault Protection Features

- Integral DIN rail mount with spring loaded mounting clips.\*
- Setpoint options include factory-adjustable setpoint from 5 mA –100 mA or “TR3 Tri-Set” models with field-selectable 5/10/30 mA settings.
- Finger-safe terminals for worry-free installation and operation.
- Aperture orientation is perpendicular to DIN rail, allowing for clean and efficient wiring and minimizing space between multiple components.
- Choice of dependable latching SPST or SPDT (form C) electromechanical relay outputs.
- Uses “Zero Sum” operating principle to reliably sense imbalance in magnetic fields associated with current leakage to ground.
- Typical response times from 15 ms to 200 ms.
- Integral “push-to-test” button with LED indication of contact status.
- UL/cUL and CE Approved. Accepted worldwide.


\*For information on the DIN rail accessories kit, see page 122.

Ground Fault Protection Dimensions

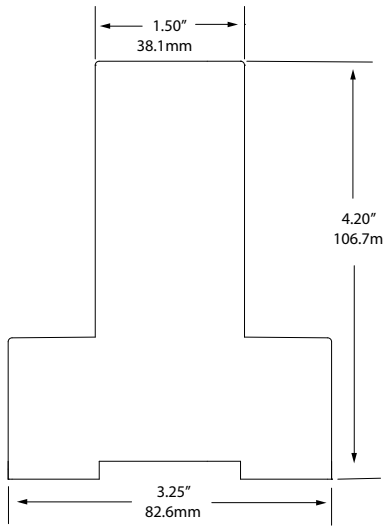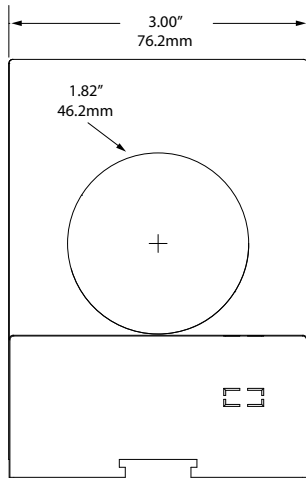


Ground Fault Protection Connections

Auto-Reset

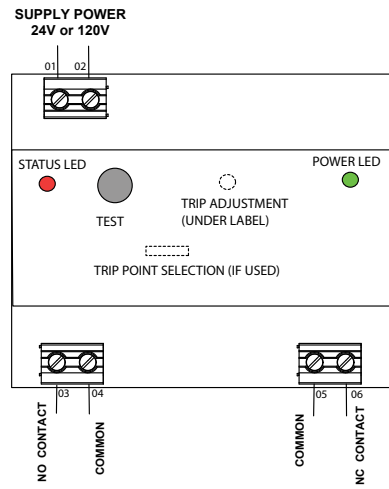

Latching

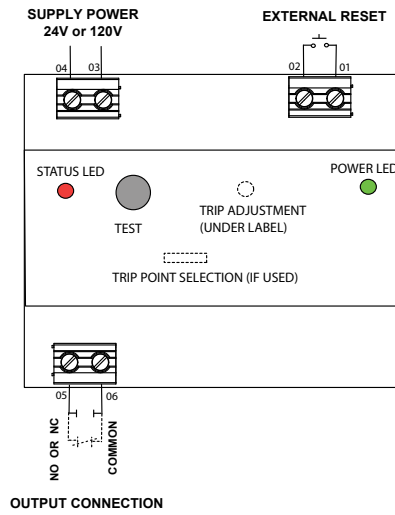

### Ground Fault Protection Specifications



<b>Power Supply</b>	<ul style="list-style-type: none"> <li>• 120 VAC (66–132 V)</li> <li>• 24 VAC (19–29 V)</li> </ul>
<b>Power Consumption</b>	<2 VA
<b>Setpoint Range</b>	Factory-calibrated models (specify when ordering): <ul style="list-style-type: none"> <li>• AG1: 5–100 mA (005–100)</li> <li>• AG2: 80–950 mA (080–950)</li> </ul> TR3 “Tri-set” models (field jumper select): <ul style="list-style-type: none"> <li>• AG3: 5, 10, or 30 mA</li> </ul>
<b>Output</b>	Electromechanical SPDT relay
<b>Output Rating</b>	1 A @ 125 VAC, 2 A @ 30 VDC
<b>LED Display</b>	<ul style="list-style-type: none"> <li>• Green LED = Power On indication</li> <li>• Red LED = Tripped Output Relay indication</li> </ul>
<b>Response Time</b>	<ul style="list-style-type: none"> <li>• 200 ms @ 5% above trip point</li> <li>• 60 ms @ 50% above trip point</li> <li>• 15 ms @ 500% above trip point</li> </ul>
<b>Time Delay</b>	None
<b>Noise Immunity</b>	<ul style="list-style-type: none"> <li>• EMI/RFI Shielding</li> <li>• Power supply noise filtering</li> </ul>
<b>Isolation Voltage</b>	UL listed to 1270 VAC, tested to 5 KV
<b>Frequency Range</b>	50–60 Hz (monitored circuit)
<b>Case</b>	UL94 V-0 Flammability Rated
<b>Mounting</b>	DIN rail mounting
<b>Environmental</b>	-4 to 122°F (-20 to 50°C) 0–95% RH, non-condensing
<b>Listings</b>	UL/cUL, CE

### Output Tables

#### Normally Energized Models (-ENE Option)

Protection from faults and control power loss.

	Control Power Applied		
	No Power	No Fault	Fault
N.C. Normally Closed	closed	open	closed
N.O. Normally Open	open	closed	open


#### Normally De-energized Models (-DEN Options)

Protection from faults only when power is applied.

	Control Power Applied		
	No Power	No Fault	Fault
N.C. Normally Closed	closed	closed	open
N.O. Normally Open	open	open	closed

### Ground Fault Protection Ordering Information

Sample Model Number: AGL1-NOR-120-LA-005  
Ground fault relay with normally open SPST latching relay output, 120 VAC power supply and 5 mA trip point.



#### (1) Setpoint Range

1	5–100 mA factory set
2	80–950 mA factory set
3	5/10/30 mA jumper set

#### (2) Output Type

NCR1	Normally Closed SPST Relay Form B (Available only with -LA option)
NOR1	Normally Open SPST Relay Form A (Available only with -LA option)
SDT1	SPDT Relay (Form C) with auto-reset (Available only with -DEN and -ENE options)

#### (3) Power Supply

120	120 VAC
24U	24 VAC/DC

#### (4) Options

ENE	Normally Energized, auto-reset (SDT1 output only)
DEN	Normally De-energized, auto-reset (SDT1 output only)
LA	Latching (NOR1 and NCR1)

#### (5) Setpoint

TR3	Tri-set
005 to 950	Factory set trip point in mA

#### (6) Noise Immunity

N	Noise Immunity
	None (blank)

Ground Fault Protection

**OEMs** Test & Evaluation Units for OEMs  
Free program expedites evaluation process. See page 1 for details.

