



universal data loggers



MSR 145: Mini Data Logger for Temperature, Humidity, Pressure, Light, Acceleration




This thumb-sized Swiss Quality MSR145 data logger is capable of simultaneously measuring and recording a variety of measures such as temperature, humidity, pressure, 3-axis acceleration and light.

Freely selectable measurement rates of up to 50 values per second guarantee uninterrupted documentation of rapid processes. For long-term measurements, the MSR 145 data logger has been fitted with a 900 mAh lithium polymer battery allowing you to record measured values over a period of up to two years. All measured values can be rapidly transferred to a PC or laptop via the USB interface or microSD card for data analysis purposes.

The housing, the battery and measurement parameters, together with the type and number of sensors (internal and external) can be configured individually.



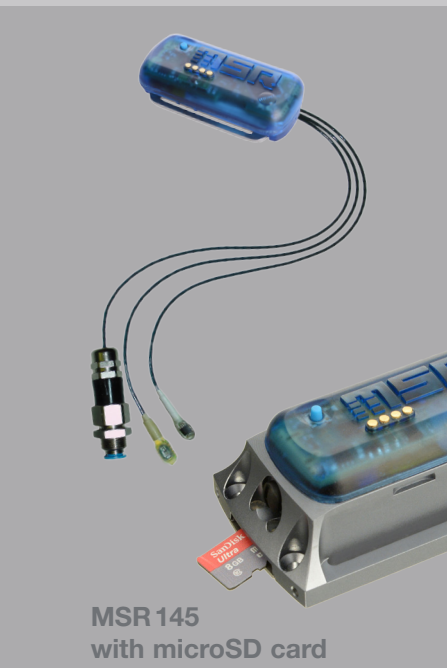


General technical data

Memory capacity:	Over 2 000 000 measured values – expandable to over 1bn measured values with optional microSD card.
Push-button:	Set bookmark or start and stop recording.
LED:	blue: Record indicator red: Alarm indicator yellow: Battery change indicator
Power supply:	<ul style="list-style-type: none"> Lithium-polymer battery, 230 mAh or 900 mAh. The battery is charged via the USB connection.
Options:	Charging station (USB hub) for 7 MSR 145
Interface:	USB
PC software:	Free Setup, Reader, Viewer and Online software (Windows XP/Vista/7/8/10) to record and evaluate data. All measured values can be rapidly transferred to a PC via USB connection both during the measurement operation and once the measurement task has been completed. Thanks to the integrated clock (RTC), data from as many MSR145 units as required can be synchronised and merged into a single data record.
Operating conditions:	<ul style="list-style-type: none"> Temperature -20...+65 °C
Storage conditions:	<ul style="list-style-type: none"> Temperature +5...+45 °C (ideal storage conditions for the battery) 10...95% relative humidity, non-condensing
Standards:	The MSR 145 complies with EU-Directives RoHS / WEEE.



MSR 145 with microSD card

Housing and battery selection


Housing	Sheet material battery capacity	Picture	Size & weight (W x H x L)	Medium
Standard IP 60	PC housing 230 mAh		27 x 16 x 53 mm approx. 20 g	Air
	PC housing 900 mAh		39 x 23 x 72 mm approx. 56 g	
Waterproof IP 67	Silicon tube 230 mAh		20 x 14 x 62 mm approx. 18 g	Air, various liquids
	PC housing 230 mAh		27 x 16 x 53 mm approx. 27 g	
	PC housing 900 mAh		39 x 23 x 72 mm approx. 64 g	

Selection of Sensors

Make an individual assembly of your MSR145 data logger and select the requested internal and external sensors (cable length 0.20 m, 1.0 m, 1.6 m).

Measured parameters	Working range	Accuracy	Measurement/storage rate
Temperature	ext.: -10...+58°C	±0.1°C (+5...+45°C) ±0.2°C (-10...+58°C)	1/s to every 12 h
	ext.: -55...+125°C	±0.5°C (-10...+65°C) ±2°C (-55...+125°C)	
	int.: -20...+65°C	±0.5°C (-10...+65°C) ±2°C (-55...+125°C)	
	ext.: 1 or 4 connectors for K-type thermocouples (excluding sensor) -250...+1200°C		
Relative humidity with integrated temperature	0...100% rel. humidity ext. -20...+85°C int. -20...+65°C	±2% rel. humidity (10...85%, 0...+40°C) ±4% rel. humidity (85...95%, 0...+40°C)	1/s to every 12 h
Air pressure absolute, with integrated temperature	0...2000 mbar absolute ext. -20...+85°C int. -20...+65°C	±2.5 mbar (750...1100 mbar absolute, +25°C)	10/s to every 12 h
	0...14 bar absolute -20...+65°C	±50 mbar (1...10 bar absolute, +25°C)	
Fluid pressure (external sensor) Material in contact with media: • Stainless Steel AISI 316L (DIN1.4404/1.4435) • O-Rings: Viton® 70° Shore	0...3000 mbar absolute -20...+85°C	±30 mbar	20/s to every 12 h
	0...30 bar absolute -20...+85°C	±300 mbar	
3-axis-acceleration opt. fast peak (1 kHz)	±15 g -20...+65°C	±0.15 g (0...5g, +25 °C) ±0.25 g (5...10g, +25 °C) ±0.45 g (10...15g, +25 °C)	50/s to every 12 h
Light	0...65'000 lx	max. sensitivity at 500 nm	1/s to every 12 h

Additional analogue inputs for connecting third-party sensors

Analogue Inputs	Technical data
Including alarm output and input for starting and stopping data recording. 	2 or 4 analogue inputs with freely selectable input configuration: 0...20 mA; 4...20 mA; 0...3.0 V; 0.5...4.5 V; 0...5.0 V; 1.0...6.0 V; 0...10.0 V; 0...12.0 V; 0...24.0V; Resolution: 12 Bit Measurement/storage rate: 50/s up to one sample every 12 h

Please contact us for prices and terms of delivery.



universal data loggers



External temperature sensor



Connector for thermocouples



External humidity sensor



External fluid pressure sensor



External light sensor

MSR Electronics GmbH

Mettlenstrasse 6
CH-8472 Seuzach
Switzerland

Tel. +41 52 316 25 55
Fax +41 52 316 35 21
info@msr.ch
www.msr.ch

