FLUKE®
Calibration

RPM4™
Reference Pressure Monitor

Technical Data



Premium performance, unmatched features, compact and rugged

RPM4 is much more than a traditional pressure indicator

State of the art performance from very low pressure to 280 MPa (40 000 psi)…advanced on-board features…compact and rugged…full local and remote communications…RPM4 is the perfect solution in a wide variety of high end pressure calibration, testing and measurement applications.

Infinite Ranging™ and AutoRange™

Infinite Ranging gives RPM4 unprecedented versatility in adapting to the specific range of operation. With the easy to use AutoRange function, a few simple key strokes or a single remote command string at the start of a test adapt every feature of the pressure monitor to optimize it for the range to be covered. Just enter the maximum pressure and the measurement mode. AutoRange then:

- Selects and activates the most appropriate Q-RPT to cover the specified range and measurement mode.
- Sets the pressure unit of measure.
- Activates absolute, gauge or compound gauge measurement.
- Adjusts display resolution to the appropriate level for the range.
- Adjusts overpressure alarms to the actual range of operation.
- Reduces measurement uncertainty proportionally to the selected range (premium class Q-RPTs only).

Note: The use of RPM4's Infinite Ranging and AutoRange feature is recommended to optimize operation for a specific range but is not required to obtain "% of reading" measurement specifications.

Features

- Stability based Ready/Not Ready indication
- Built-in fluid head corrections
- User defined pressure units
- Intelligent AutoZero™ function
- Remote [ENTER] switch
- Large character, easy to read display
- 12 V dc power and battery pack option
- RS-232 and IEEE-488 communications
- FLASH memory and free embedded software upgrades on dhinstruments.com
- PC based recalibration utility software included
- Free LabVIEW® drivers

원문: Fluke Calibration RPM4 RPM4 Reference Pressure Monitor · 제조사 원문 자료입니다. 사양은 제조사 사정에 따라 변경될 수 있습니다.


SDS™ Q-RPT Self Defense System™

All Q-RPT modules up to 7 MPa (1 000 psi) include the Fluke Calibration unique Self Defense System (SDS). SDS valves automatically isolate and vent the module's Q-RPT when it is not in use or an overpressure is about to occur. With SDS, any Q-RPT module can be left connected to pressure up to 10 MPa (1 500 psi) without needing to isolate or disconnect it.


Advanced on-board functions

RPM4 provides a variety of advanced on-board pressure data functions including:

- Special data such as pressure average over time, rate of change, hi/lo, freeze, deviation from set point
- Differential mode directly measures the difference between two Q-RPTs including taring at the line pressure
- Parallel measurement uses two Q-RPTs redundantly as one
- Leak check measures average pressure rate of change over a user set time period
- AutoTest automates calibration routines with tolerance testing and data logging

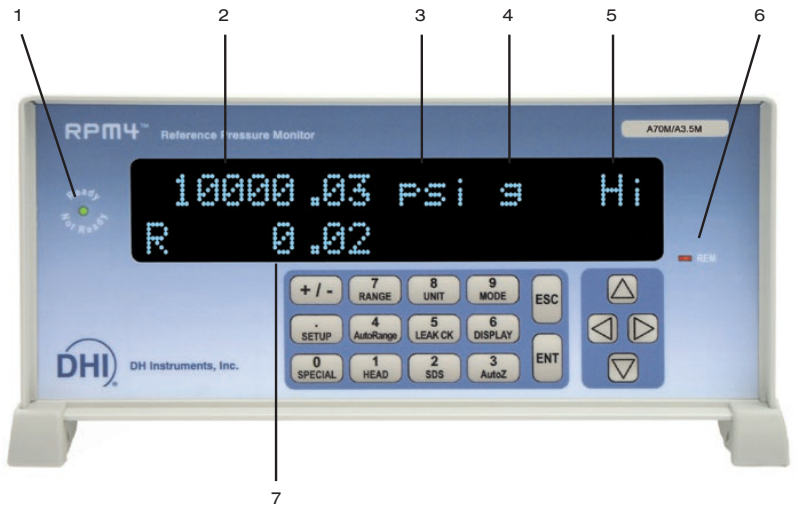

1. Pressure "Ready" (green) "Not Ready" (red) based on real time measurement of pressure stability
2. Measured pressure
3. Pressure unit of measure
4. Measurement mode
5. Active Q-RPT module (Hi or Lo)
6. Remote activity indicator
7. Special functions display

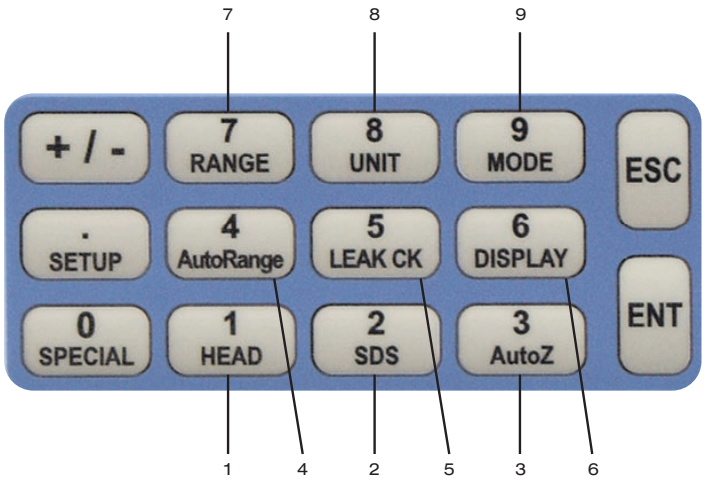

1. HEAD: Make automatic fluid head corrections for differences in height between RPM4 and DUT.
2. SDS: User control of Q-RPT Self Defense System.
3. AutoZ: Automated zeroing of reference pressure transducers in absolute and gauge measurement modes.
4. AutoRange: Automatically optimize all measurement characteristics for the exact range of operation.
5. LEAK CK: Run and view automated leak check functions.
6. DISPLAY: Select special display functions including rate, average, freeze, high/low, deviation.
7. RANGE: Select between Q-RPTs and saved AutoRange ranges.
8. Unit: Select pressure unit of measure.
9. Mode: Select pressure measurement mode (absolute, gauge, compound gauge, Hi-Lo differential).

원문: Fluke Calibration RPM4 RPM4 Reference Pressure Monitor · 제조사 원문 자료입니다. 사양은 제조사 사정에 따라 변경될 수 있습니다.

FLUKE® Calibration


Quartz reference pressure transducer (Q-RPT) modules

RPM4's outstanding pressure measurement specifications are made possible by DHI's exclusive quartz reference pressure transducer (Q-RPT) modules.

Q-RPTs measure pressure by measuring the change in the natural oscillating frequency of a quartz crystal with pressure induced stress. To be qualified for use in a Q-RPT module, each transducer is individually evaluated and characterized using primary pressure standards. Only transducers exhibiting required levels of linearity, repeatability and stability are selected. A proprietary compensation model, derived from more than 15 years experience with thousands of quartz pressure transducers, is applied to optimize the metrological characteristics needed in a transfer standard. Standard and premium class Q-RPT modules are available to best fit your performance and budgetary requirements.

A unique dynamic compensation for atmospheric pressure system uses an independent on-board barometer to provide seamless switching between absolute, gauge and compound gauge modes at any time. The barometer is used only to measure the small variations in atmospheric pressure that occur during gauge mode operation so its absolute error and drift over time do not contribute to measurement uncertainty. Q-RPT modules offer the advantages of:

- % of reading measurement uncertainty with AutoRange span turndown available
- Negligible warm up time
- No gas species dependence
- Quartz element isolated from test medium
- Low sensitivity to orientation




Q-RPT Module

Q-RPTs and ranges

Q-RPT designation	SI version		US version		Measurement mode(s) supported	Operating media	SDS™ Self Defense System
	Maximum range (kPa) absolute	Maximum range (kPa) gauge	Maximum range (psi) absolute	Maximum range (psi) gauge			
A280M-L	280 000	280 000	40 000	40 000	Absolute gauge and compound gauge	Oil standard, gas available	Not available
A200M-L	200 000	200 000	30 000	30 000			
A140M-L	140 000	140 000	20 000	20 000			
A100M-L	100 000	100 000	15 000	15 000			
A70M	70 000	70 000	10 000	10 000		Gas standard, oil available	
A40M	40 000	40 000	6 000	6 000			
A20M	20 000	20 000	3 000	3 000			
A14M	14 000	14 000	2 000	2 000			
A10M	10 000	10 000	1 500	1 500			
A7M	7 000	7 000	1 000	1 000			Included
A3.5M	3 000	3 500	500	500		Gas only	
A2M	2 000	2 000	300	300			
A1.4M	1 400	1 400	200	200			
A700K	700	700	100	100			
A350K	350	250	50	35			
A200K	200	100	30	15			
A160K	160	60	23	8			
A100K	110	10	16	1.5			
BA100K[1]	110	–	16	–			
G200K	–	200	–	30	Gauge only		
G100K	–	100	–	15			
BG15K[2]	–	15	–	2.2			
G15K	–	15	–	2.2			

[1] BA100K is a barometer with a low point of 70 kPa (10 psia).
[2] BG15K is bidirectional gauge from -15 kPa to +15 kPa (-2.2 psi to +2.2 psi).

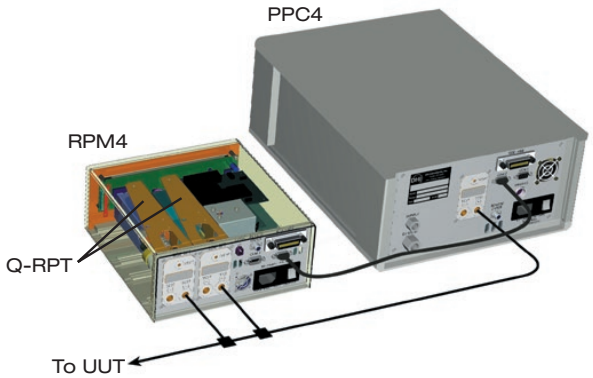

Compatible with PPC4 automated pressure controller

RPM4 can be used as an external reference pressure measurement device for a PPC4, fully automated, pressure controller/calibrator. One or two RPM4s can be "daisy chained" to PPC4 by 9 pin RS-232 cable(s). The RPM4's Q-RPTs become part of the PPC4 system and are managed by PPC4 transparently to the user. There is only one test connection for the PPC4 system's full range of operation.

See the PPC4 product brochure for additional information.

원문: Fluke Calibration RPM4 RPM4 Reference Pressure Monitor · 제조사 원문 자료입니다. 사양은 제조사 사정에 따라 변경될 수 있습니다.

FLUKE®
Calibration

General specifications

Power requirements	RPM4: 85 V ac to 264 V ac, 50/60 Hz, 25 V a max and 12 V dc @ 9 Ahr Battery/charger: 100 V ac to 240 V ac, 50/60 Hz
Normal operating temperature range	15 °C to 35 °C (59 °F to 95 °F)
Vibration	Meets MIL-T-28800D
Weight (typical)	5 kg (11 lb)
Dimensions (H x W x D)	RPM4: 10 cm x 22.7 cm x 24 cm (3.9 in x 8.9 in x 9.5 in) Battery/charger: 8 cm x 22.5 cm x 20 cm (3.1 in x 8.9 in x 7.9 in)
Communications ports	RS-232 (COM1, COM2), IEEE-488.2
Operating modes	Absolute, gauge, compound gauge, differential
Pressure ranges	Vacuum to 280 MPa (40 000 psi)
Operating media	Q-RPTs lower than A7M: Gas only All others: Either gas or oil
Calibration	ISO 17025 accredited calibration report included
Pressure connections	Up to A70M: 1/8 in. NPT F Above A70M: DH500 (equivalent to AE250C)
CE Mark	Available, must be specified

Measured pressure (Q-RPT)				
Warm up time	30 minute temperature stabilization recommended from cold power up			
Resolution	To 1 ppm, user adjustable			
Predicted one year stability[1]	± 0.005 % of reading all ranges and classes			
	Standard Class	**Premium Class**	**Q-RPTs A14M to A140M (2 000 to 20 000 psi)**	**Q-RPTs A200M to A280M (30 000 to 40 000 psi)**
	Q-RPTs up to A10M (1 500 psi)[6]			
Precision[2]	± 0.008 % of reading or 0.0024 % of Q-RPT span, whichever is greater[4]	± 0.005 % of reading, 0.0015% of AutoRanged span or 0.0005 % of Q-RPT span, whichever is greater[5]	± 0.012 % of reading or 0.0036 % of Q-RPT span, whichever is greater[4]	± 0.015 % of reading or 0.0045 % of Q-RPT span, whichever is greater[4]
Measurement Uncertainty[3]	± 0.010 % of reading or 0.0030 % of Q-RPT span, whichever is greater[4]	± 0.008 % of reading, 0.0024 % of AutoRanged span or 0.0007 % of Q-RPT span, whichever is greater[5]	± 0.013 % of reading or 0.0039% of Q-RPT span, whichever is greater[4]	± 0.018 % of reading or 0.0054 % of Q-RPT span, whichever is greater[4]

[1] Predicted one year stability limit (k=2) assuming regular use of AutoZero function. Absolute mode predicted one year stability without use of AutoZ is ± (0.005 % Q-RPT span + 0.005 % of reading).

[2] Combined linearity, hysteresis and repeatability. Add ± 1 Pa (0.00015 psi) in gauge mode with an Axxx Q-RPT for the resolution and short term stability of the on-board barometer.

[3] Maximum deviation of the Q-RPT indication from the true value of applied pressure including precision, predicted one year stability, temperature effect and calibration uncertainty, combined and expanded (k=2) following the ISO "Guide to the Expression of Uncertainty in Measurement."

[4] % of reading value times measured pressure from 100 % to 30 % of Q-RPT span. Under 30 % of Q-RPT span, % of reading value times 30 % of Q-RPT span. For example, if the Q-RPT is a Standard A160K, the Measurement Uncertainty in pressure is 0.010 % times the measured pressure to 48 kPa (160 kPa span x 30 %) and 0.0048 kPa (160 kPa span x 30 % x 0.01 %) under 48 kPa.

[5] % of reading value times measured pressure from 100 to 30 % of AutoRanged span. Under 30 % of AutoRanged span, % of reading value times 30 % of AutoRanged span. If AutoRanged span is less then 30 % of maximum Q-RPT span, % of reading values times measured pressure, or % of reading times 9 % of Q-RPT span, whichever is greater. For example, if the Q-RPT is a Premium A160K and AutoRanged span is 160 kPa, the Measurement Uncertainty in pressure is measured pressure x 0.008 % to 48 kPa (160 kPa AutoRanged span x 30 %) and 0.0038 kPa (160 kPa span x 30 % x 0.008 %) under 48 kPa. If the AutoRanged span is 100 kPa (greater than 30 % of 160 kPa maximum Q-RPT span), the Measurement Uncertainty in pressure is measured pressure x 0.008 % to 30 kPa (100 kPa AutoRanged span x 30 %) and 0.0025 kPa (100 kPa span x 30 % x 0.008 %) under 30 kPa. If the AutoRanged span is 30 kPa (less than 30 % of the 160 kPa maximum Q-RPT span), the Measurement Uncertainty in pressure is measured pressure x 0.008 % to 14.4 kPa (160 kPa maximum Q-RPT span x 9 %) and 0.0012 kPa (160 kPa maximum Q-RPT span x 9 % x 0.008 %) under 14.4 kPa. For GXXX ranges, the total uncertainty is expanded to 0.015% reading or 0.0045% of Q-RPT span, whichever is greater when used outside of the altitude range of -90 to 900 meters (-300 to 3000 feet).

[6] Premium class not available on G100K and G200K ranges.

Ordering information

Model
RPM4 04 -1 US units version, -2 SI units version
RPM4 05 CE mark
RPM4 06 Special calibration
RPM4 07 Special test fluid, Hi Q-RPT (specify fluid)
RPM4 08 Special test fluid, Lo Q-RPT (specify fluid)
RPM4 09 -1 Special configuration, air data (A160K/A160K, A350K/A160K only)

Accessories
Battery Pack/Charger 12 V dc battery with charger
Rack Mount Kit Rack mount kit for standard 19 in. rack
Footswitch Remote [ENTER] footswitch
MPC1-1000 Manual gas pressure controller, for vacuum to 7 000 kPa (1 000 psi)
MPC1-3000 Manual gas pressure controller, for vacuum to 20 MPa (3 000 psi)
MPC1-D-1000 Manual pressure controller, for differential pressure at line pressure up to 7 000 kPa (1 000 psi)
MPC1-D-3000 Manual pressure controller, for differential pressure at line pressure up to 20 MPa (3 000 psi)
GPC1-16000 Assisted gas pressure controller, 110 MPa (16 000 psi)
MPG1-100M Manual hydraulic pressure generator/controller, 100 MPa (15 000 psi)
MPG1-200M Manual hydraulic pressure generator/controller, 200 MPa (30 000 psi)
OPG1-30000 Assisted hydraulic pressure generator/controller, 200 MPa (30 000 psi)
PK-7000-PPC/MPC Interconnections kit for RPM4 and MPC1 with quick-connector test connection

Configuring an RPM4 model number

RPM4 mhhhac/mlllac

Where:

mhhhac	Indicates the Hi Q-RPT designation. c indicates Q-RPT class (s for Standard, p for Premium).
mlllac	Indicates the Lo Q-RPT designation and class. Leave blank if there is no Lo Q-RPT.

See Q-RPTs and ranges table for available Q-RPTs.

Fluke Calibration.
Precision, performance, confidence.™

Fluke Calibration
PO Box 9090, Everett, WA 98206 U.S.A.

Fluke Europe B.V.
PO Box 1186, 5602 BD
Eindhoven, The Netherlands

For more information call:
In the U.S.A. (877) 355-3225 or
Fax (425) 446-5116
In Europe/M-East/Africa +31 (0) 40 2675 200 or
Fax +31 (0) 40 2675 222
In Canada (800)-36-FLUKE or
Fax (905) 890-6866
From other countries +1 (425) 446-5500 or
Fax +1 (425) 446-5116
Web access: http://www.flukecal.com

©2010-2012, 2019-2021 Fluke Calibration.
Specifications subject to change without notice.
Printed in U.S.A. 1/2021 210026-en

Modification of this document is not permitted without written permission from Fluke Calibration.

원문: Fluke Calibration RPM4 RPM4 Reference Pressure Monitor · 제조사 원문 자료입니다. 사양은 제조사 사정에 따라 변경될 수 있습니다.