


GSP-730 3GHz SPECTRUM ANALYZER & GRF-1300 RF and COMMUNICATION TRAINER



Turn-key Solution for RF and Communication Experiment Courses

GW Instek GSP-730 is a 3 GHz Spectrum Analyzer mainly developed to fulfill the demands of RF Communication educations. Budget constraint and inadequate of teaching tools are normally the two hurdles for schools to provide high-quality courses for RF communication experiments. GSP-730 is a spectrum analyzer of full functions, with appropriate combination with the training kit, GRF-1300, provide customers an economic turn-key solution for 3GHz RF Communication Experiment Courses.

With its components, GSP-730 Spectrum Analyzer, GRF-1300 RF and Communication Trainer and a PC, properly connected, a tangible system is integrated for performing ongoing experiments while the lecture is being given. Using a PC, the teacher can present teaching material with PowerPoint slide and simultaneously control GSP-730 and GRF-1300 to perform experiments and get spectrum displays and parameter readings on the PC screen. GSP-730 and GRF-1300 easily transferred the current teaching materials, including the PowerPoint slides, textbook, and the remote control software, into electronic-teaching system.

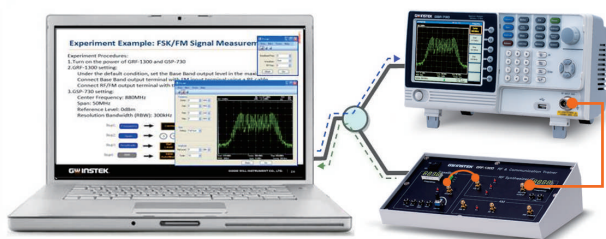

Fully-electronic RF Training System

The combination of GSP-730 and GRF-1300 forms a fundamental training system for RF communication and telecommunication classes in the universities, colleges, vocational schools, and the training centers in military as well as the private companies. Instead of the tremendous cost of the installation of new training system, the conjunction of GSP-730 and GRF-1300 provides an economic solution to eliminate two obstacles, budget constraint and insufficiency of teaching tools.

GSP-730 & GRF-1300

FEATURES

GSP-730 Spectrum Analyzer

- Frequency Range : 150kHz ~ 3GHz
- Autoset Function
- Noise level : $\leq -100\text{dBm}$
- RBW Range : 30kHz, 100kHz, 300kHz, 1MHz
- ACPR/CHPW/OCBW Measurement
- 3 Traces in Different Colors
- Split Window Function
- Limit Line Function
- Remote Control Software
- Presentation Material for Training Courses
- Support Interface : USB Device/Host, RS-232C
- 5.6" TFT LCD with VGA Output

GRF-1300 RF and Communication Trainer

- Waveform Support :
 - Sine Wave : 0.1 ~ 3MHz
 - Square Wave : 0.1 ~ 3MHz
 - Triangle Wave : 0.1 ~ 3MHz
- RF Frequency : 870 ~ 920MHz
- AM Modulation & FM Modulation
- 5 On/Off Switches and 5 Test Points to Simulate 8 Failure Conditions for Learning Outcome Test
- USB Interface to Provide Remote Control

APPLICATIONS

- Education, Training
- Fourier Theory Investigation
- Motherboard Circuit Measurement
- Wireless Communication Signal Measurements
 - GSM, 3G, 4G Mobile Phone
 - Bluetooth, Zigbee, Wi-Fi
 - AM/FM Modulation
- Remote Controller Maintenance

GSP-730 & GRF-1300

GW INSTEK
Simply Reliable

원문: GW Instek GSP-730 데이터시트 · 제2차 원문 자료입니다. 사양은 제조사 사정에 따라 변경될 수 있습니다.

SPECIFICATIONS			
GSP-730			
FREQUENCY	Frequency Range	Setting Range	150kHz ~ 3GHz
	Center Frequency	Setting Resolution	0.1MHz
	Frequency Span	Accuracy	within $\pm 50\text{kHz}$ (frequency span : 0.3GHz ~ 2.6GHz, 20 $\pm 5^\circ\text{C}$)
	Resolution Bandwidth	Setting range	1MHz ~ 3GHz
	SSB Phase Noise	Accuracy	within $\pm 3\%$ (frequency span : 0.3GHz ~ 2.6GHz, 20 $\pm 5^\circ\text{C}$)
AMPLITUDE	Inherent Spurious Response	Setting Range	30KHz, 100KHz, 300KHz, 1MHz
			-85dBc/Hz (typical, 500kHz offset, RBW : 30kHz, Sweep time : 1.5s, Span : 1MHz@1GHz) less than -45dBc@-40dBm Ref. Level (typical less than -50dBc)
AMPLITUDE	Reference Level	Input Range	+20 ~ -40dBm
	Average Noise Level	Accuracy	Within $\pm 2\text{dB}$ (1GHz) ; SPAN : 5MHz
	Frequency Characteristic	Unit	dBm, dBV, dB μV
	Input		$\leq -100\text{dBm}$ (typical, center frequency : 1GHz RBW : 30kHz)
			within $\pm 3.0\text{dB}$ @300MHz ~ 2.6GHz within $\pm 6.0\text{dB}$ @80 ~ 300MHz, 2.6 ~ 3GHz
SWEEP	Sweep Time	Input Impedance	50 Ω
		Input VSWR	less than 2.0@input att $\geq 10\text{dB}$
GENERAL	Display	Input damage level	+30dBm (CW average power), 25VDC
	Communication Interface	Input connector	N connector
OTHER	VGA Output		
	Power Source		
DIMENSIONS & WEIGHT	Operating Temperature		5 ~ 45 $^\circ\text{C}$ (Guaranteed at 25 $\pm 5^\circ\text{C}$, without soft carrying case)
	Operating Humidity		Less than 45 $^\circ\text{C}$ / 90%RH
DIMENSIONS & WEIGHT	Storage Temperature		-20 ~ 60 $^\circ\text{C}$, less than 60 $^\circ\text{C}$ / 70%RH
			296(L) $\times$ 153(W) $\times$ 105(H) mm / 11.6(L) $\times$ 6(W) $\times$ 4.1(H) in Approx. 2.2kg / 4.9lb
GRF-1300			
BASE BAND	Waveforms		Sine, Square, Triangle
	Frequency Range		0.1 ~ 3MHz ; Step : 10kHz
	Amplitude		$\geq 1.5\text{Vpp}$
RF/FM GENERATOR	Harmonics Distortion		$\geq -30\text{dBc}$
	Frequency Accuracy		$\pm 0.15\text{MHz}$
FM	Adjustable Range		$\geq 45\text{MHz}$ (870M ~ 920MHz) ; Step: 1MHz
	Power Range		$\geq -15\text{dBm}$
AM	Max Frequency Deviation		$> 3\text{MHz}$
INTERFACE	Peak Difference		$\geq -18\text{dBm}$
DIMENSIONS & WEIGHT	USB		USB Device
			165(W) $\times$ 155(H) $\times$ 90(D)mm / 6.5(W) $\times$ 6.1(H) $\times$ 3.5(D)in Approx. 1.2kg / 2.6lb

Specifications subject to change without notice. SP-730GD1DH

ORDERING INFORMATION		OPTION
GSP-730	3GHz Spectrum Analyzer	GBK-001 Experiment text book of teacher version
GRF-1300	RF and Communication System Trainer	FREE DOWNLOAD
ACCESSORIES		PC Software Training syetem remote control software
GSP-730 : Quick start manual x 1, User manual CD x 1, Power cord x 1		
GRF-1300 : Experiment text book of student version, Power point file and remote control software CD, RF cable x 3, Antenna x 1, N to SMA adaptor connector, Power cord x 1		

Global Headquarters
GOOD WILL INSTRUMENT CO., LTD.
 No.7-1, Jhongsing Road, Tucheng Dist., New Taipei City 236, Taiwan
 T +886-2-2268-0389 F +886-2-2268-0639
 E-mail: marketing@goodwill.com.tw

China Subsidiary
GOOD WILL INSTRUMENT (SUZHOU) CO., LTD.
 NO. 69, Lushan Road, SND, Suzhou Jiangsu 215011 China
 T +86-512-6661-7177 F +86-512-6661-7277
 E-mail: marketing@instek.com.cn

Malaysia Subsidiary
GOOD WILL INSTRUMENT (M) SDN. BHD.
 27, Persiaran Mahsuri 1/1, Sunway Tunas,
 11900 Bayan Lepas, Penang, Malaysia
 T +604-6309988 F +604-6309989
 E-mail: sales@goodwill.com.my

U.S.A. Subsidiary
INSTEK AMERICA CORP.
 3661 Walnut Avenue Chino, CA 91710, U.S.A.
 T +1-909-5918358 F +1-909-5912280
 E-mail: sales@instekamerica.com

Japan Subsidiary
INSTEK JAPAN CORPORATION
 4F, Prosper Bldg, 1-3-3 Iwamoto-Cho Chiyoda-Ku,
 Tokyo 101-0032 Japan
 T +81-3-5823-5656 F +81-3-5823-5655
 E-mail: info@instek.co.jp

Korea Subsidiary
GOOD WILL INSTRUMENT KOREA CO., LTD.
 Room No.805, Ace Hightech-City B/D 1Dong,
 Mullaee-Dong 3Ga 55-20, Yeongduengpo-Gu, Seoul, Korea
 T +82-2-3439-2205 F +82-2-3439-2207
 E-mail: gwinstek@gwinstek.co.kr

GW INSTEK

Simply Reliable

www.gwinstek.com

원문: GW Instek GSP-730 데이터시트 · 제조사 원문 자료입니다. 사양은 제조사 사정에 따라 변경될 수 있습니다.