


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	NOTES
1	50-00126	Connector, dc plug, 5.5x2.1x22.5 mm, brass nickel plated	1	
2	30-00003	Wire, 2C BC, 24 AWG, UL2468, 300V, 80C, 3.6 mm, VW-1, PVC, 76A	1	
3	24-00043	Overmold, PVC, black	1	

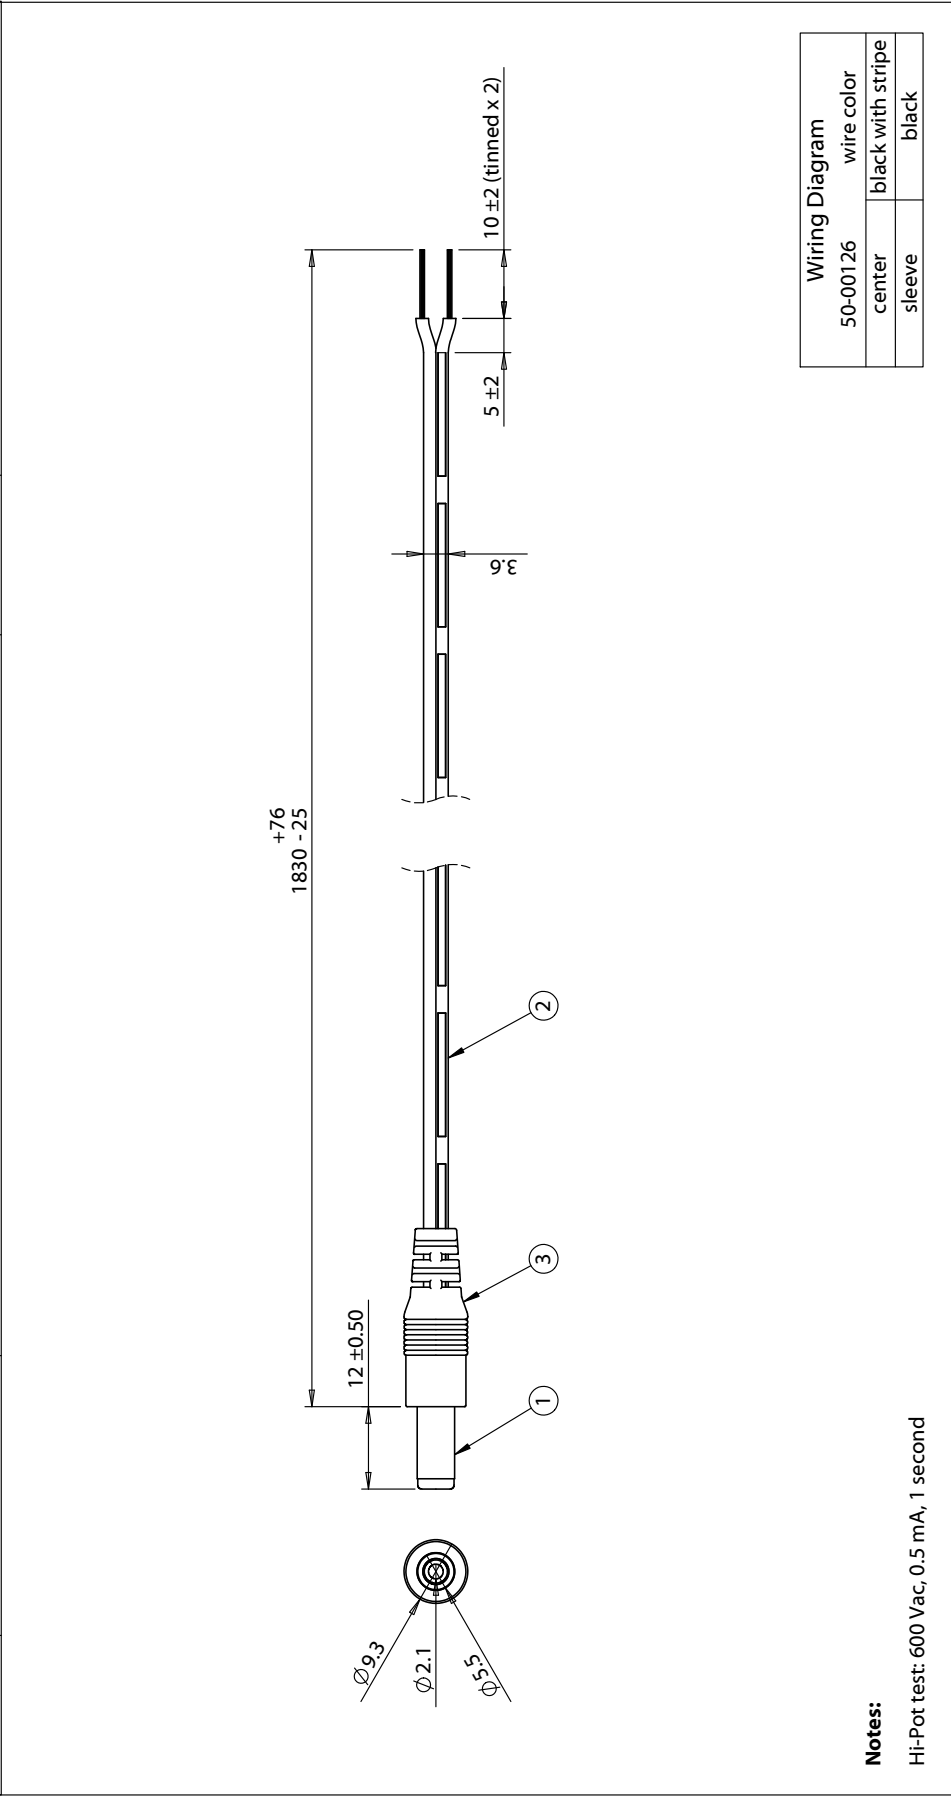

Revision:		Date:	Description:	Prepared:	Notes:
A		1/19/2009	Re-issue CUI spec as Tensility		RoHS and REACH compliant
A1		12/7/2010	Upgraded rating and added wire part number	Verified:	Function test: no open, no short circuit, no intermittent
A2		8/30/2011	Updated description, connector, and wire information	Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Description: Cable, 1830 mm, 5.5x2.1x12 mm, 50-00126 dc plug to stripped tinned leads, 24 AWG, 30-00003 wire
A3		9/10/2013	Corrected cable rating		
				Size: A	Part number: 053-0184R (CA-2185)
				Scale: 1:1	Sheet 1 of 1

원문: 데이터 시트 및 기계 도면 (media.ncd.io) · 제2차 원문 자료입니다. 사양은 제조사 사정에 따라 변경될 수 있습니다.