


Slave Devices: (right)
Offer functionality, but do not have an on-board processor.

Master Devices: (below)
Include an on-board processor programmed to generate I²C signals.



Note: All ControlEverything.com Master Devices (above) provide a regulated +5V on the I²C Port.

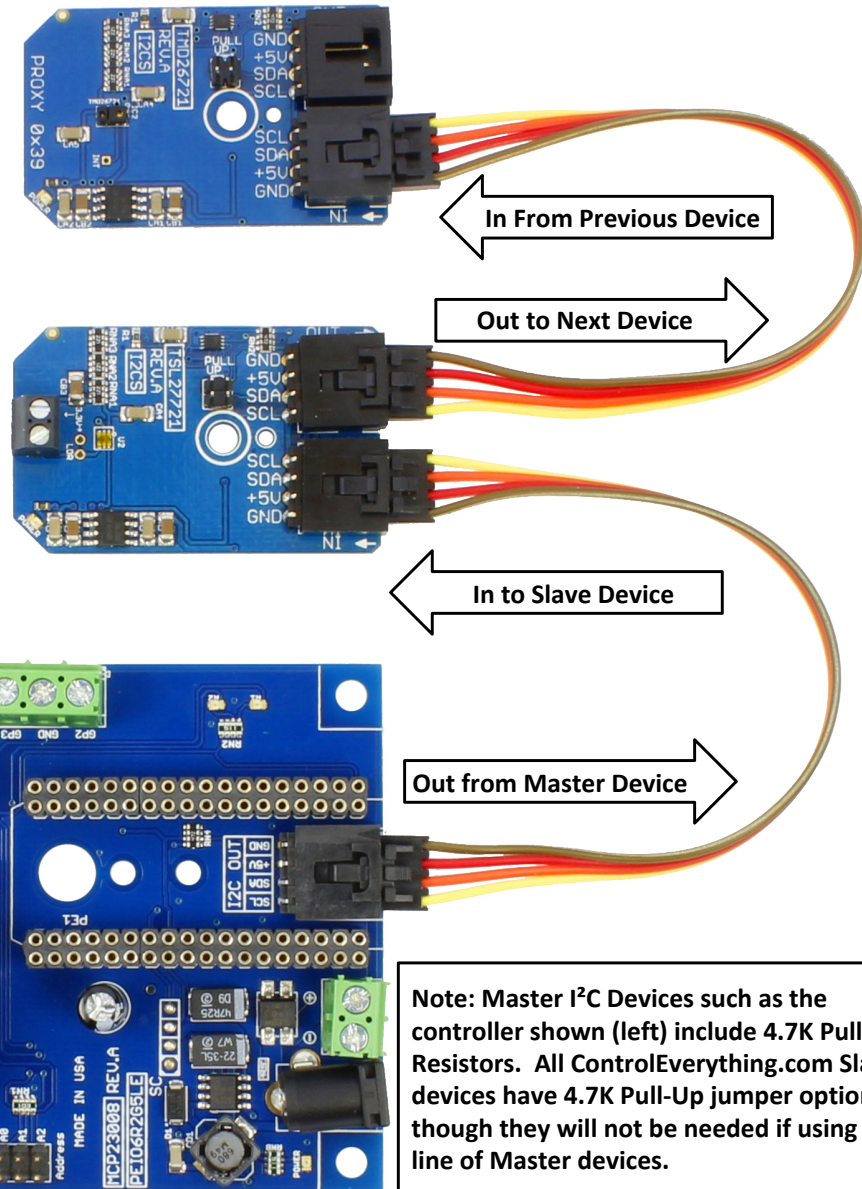