

Haier Biomedical

Intelligent Protection of Life Science

Biological Safety Cabinet

HR40-IIB2



Main Applications

Professional partial air purification equipment, it is suitable for cell biology, microbiology, biomedicine, biosafety and other related laboratories. It provides the most essential protection and isolation equipment for biosafety.

Qingdao Haier Biomedical Co.,Ltd.

No.280 Feng Yuan Road, High-tech Zone,
Qingdao, 266109, P.R. China
E-mail: inquiry@haierbiomedical.com
Website: www.haiermedical.com



Haier Biomedical
International



Haier Biomedical
International



@haiermedicalint



Haier Biomedical
International



Haier Biomedical
International


원문: Haier Biomedical HR40-IIB2 HR40-IIB2 · 제조사 원문 자료입니다. 사양은 제조사 사정에 따라 변경될 수 있습니다.

HR40-IIB2

Product advantages

- Complete air-tight protection
 - Its structural airtightness has been strictly tested; after being pressurized to 500pa and maintained for 30 minutes, the pressure inside was no lower than 480Pa. At the same time, it is completely airtight after going through the integrity test of high efficiency particulate air (HEPA) filter, making it is safe to use;
- Safe airflow system
 - The operating area utilizes an airflow disruption design and its front window has air curtain protection at the upper edge and in the surroundings, which can prevent cross over air flow between the inside and outside and thus preventing the diffusion of the internal and external pollutants;
 - The cabinet professional imported air pressure sensors can monitor the pressure changes in the positive and negative pressure zones in real-time and the sound and light alarms are automatically triggered when airflow changes exceed 20%;
 - The cabinet working space is surrounded by four negative pressure zones, which can ensure that the internal pollution is in negative pressure or is surrounded by negative pressure zones so that the operators are protected from the pollutants;
 - The cabinet is manufactured with an internationally renowned brand moisture-proof and flame-retardant glass fiber high efficiency particulate air (HEPA) filter, which ensures a filtration efficiency of 99.99% or above for particles of 0.3 microns to protect the samples, personnel and environment; The cabinets high-efficiency AC centrifugal fans combined with professional air flow distribution design to ensure lower noise and more uniform air flow;
 - The cabinet LCD screen displays in real-time the various parameters and the service life of the components, making the equipment operating conditions clearer at a glance;
 - The cabinet high intensity 254nm UV lamp enables the setting of the automatic on/off timer for the sterilization intervals, reducing user waiting times;
 - The cabinet has a linkage interlock system of ultraviolet disinfection, fluorescent lamp, front window and fan: after the front window has been opened, the fan will turn on automatically and the UV lamp will turn off to prevent the dispersal of pollutants, preventing any personnel injuries;
 - The cabinet has variety of light and sound alarm functions: hardware fault alarm, operating parameters out-of-limit alarm, filter and UV lamp service life alarm and other alarm functions.
- Friendly design
 - The front operating surface of the cabinet is manufactured with a 10-degree inclination design, which is in accordance with ergonomic principles and more comfortable to operate for the user;
 - The cabinet underframe has adjustable feet with no bare thread, avoiding dust pollution;
 - The cabinet has universal casters to facilitate movement;
 - Water valve, air valve, anti-backflow air valve and other accessories are optional.

Product dimension

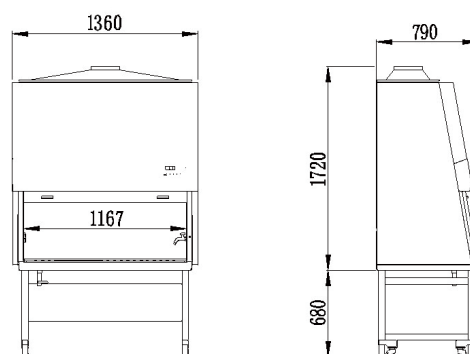

HR40-IIB2

Haier Biomedical

원문: Haier Biomedical HR40-IIB2 HR40-IIB2 · 제조사 원문 자료입니다. 사양은 제조사 사정에 따라 변경될 수 있습니다.

HR40-IIB2

Specifications

Model			HR40-IIB2
General Specifications	Power Supply (V/Hz)		220-240/50/60
	Power(VA)		1700
	Power of Blower (W)		AC 115
	Airflow Circulation		100% Exhaust
	Main Filter Typical Efficiency		ULPA, U15, 99.9995%@0.12um
	Exhaust Filter Typical Efficiency		HEPA, H14, 99.995%@0.3um
	Exhaust Filter		Single
	Filter's Brand		AAF
	Downflow Velocity (m/s)		0.28
	Inflow Velocity (m/s)		0.55
	Lighting Intensity (Lux)		≥1200
	Sound Level (dB(A))		64
Dimensions	Net/Gross Weight	kg	252/308
		lbs	555.6/679.0
	Internal Dimensions (W*D*H)	mm	1167*610*680
		in	45.9*24.0*26.8
	External Dimensions (W*D*H)	mm	1360*820*2330
		in	53.5*32.3*91.7
	Packing Dimensions (W*D*H)	mm	1445*945*1930
		in	56.9*37.2*76.0
Alarm Functions	Support Stand (mm)		680mm (standard), 680-900mm adjustable height (optional)
	Sash Opening (mm)		190 (Max 490)
	Container load (20'/40'/40'H)		8/16/16
	Alarm		Sound and Flash
	Closing Fan Alarm After Door Opening		Y
	Door Ajar		Y
	Abnormal Inflow		Y
	Abnormal Downflow		Y
	Door Open More than Limit		Y
	Filter Clogging		Y
Accessories	Filter Damage		Y
	Filter Lifetime Lack		Y
	UV light Lifetime Lack		Y
	UV Lamp		Y
	Socket		1 Socket
	Valve Port		Standard with 2 Valve Port
	Side Wall Service Taps		Standard gas tap and vaccum tap, optional compressed air tap and water tap
	Antimicrobial Powder Coating		Optional
	316SS Work Surface		Optional
	Work Surface		One-piece
	Touch Screen		N
	Motorized Window		N
Others	Foot Switch		N
	Armrest		Y
	Exhaust Duct Connection Kits		N
Certification		CE, TUV	

*Haier Biomedical reserves the right to change products and specifications without prior notice.

Haier Biomedical

원문: Haier Biomedical HR40-IIB2 HR40-IIB2 · 제조사 원문 자료입니다. 사양은 제조사 사정에 따라 변경될 수 있습니다.