

Haier Biomedical
Intelligent Protection of Life Science

-40°C Smart Frequency Conversion Freezer



DW-40L818BPT

Scope of Application:

Blood banks, hospitals, disease control centers, research institutes, electronic, chemical and other industries, cryopreservation of plasma, biologics and other products, and cold tests for components and materials

Innovative Design

- Superior temperature uniformity
- Adjustable storage shelf height
- Low sound level
- Green and environmental friendly
- High-efficiency and energy-saving compressor and system

Qingdao Haier Biomedical Co., Ltd.

No.280 Feng Yuan Road, High-tech Zone,
Qingdao, 266111, P.R. China
E-mail: inquiry@haierbiomedical.com
Website: www.haierbiomedical.com



Haier Biomedical
International



Haier Biomedical
International



@haiermedicalint



Haier Biomedical
International



Haier Biomedical
International

원문: Haier Biomedical DW-40L818BPT DW-40L818BPT · 제조사 원문 자료입니다. 사양은 제조사 사정에 따라 변경될 수 있습니다.

-40°C Smart Frequency Conversion Freezer

Product Features



High-efficiency and energy-saving compressor and system

Optimized refrigeration system with a high efficiency inverter compressor to reduce energy consumption



Green and environmental friendly

Hydrocarbon refrigerant, energy saving and environmental protection, built with Urethane foam insulation complies with European ROHS regulation



Superior temperature uniformity in a large storage space

Built-in evaporator design, and the shelf height can be adjusted according to the size of the stored articles, so as to realize the efficient use of large space in the cabinet. The temperature uniformity is $\pm 3^{\circ}\text{C}$ with the setting temperature of -40°C .



Low sound level

Noise level less than 45 dB, providing a more comfortable environment



Intelligent Control

10-inch high-performance touch screen, sensitive touch operation. Users can check the real-time operating status

Ergonomic Design



Microprocessor-controlled system

Microprocessor control, with temperature display precision at 0.1°C . Internal temperature is adjustable from -20°C to -40°C .



Configuration

Standard: RS485 interface
Optional: Temperature recorder, USB interface. Stainless steel shelves, Blood basket.



Multiple alarm functions

Including high/ low temperature, sensor error, power failure, low battery, high ambient, and door ajar alarms. Alarm mode is sound and flash. And the remote alarm interface is available



Safe and secure

Equipped with key lock, padlock, optional electronic lock, providing multiple safeguards for sample safety



Porthole

Two portholes as standard, allows for independent testing of cabinet temperature


원문: Haier Biomedical DW-40L818BPT DW-40L818BPT · 제조사 원문 자료입니다. 사양은 제조사 사정에 따라 변경될 수 있습니다.

-40°C Smart Frequency Conversion Freezer

Product Parts



Product Dimension Drawings

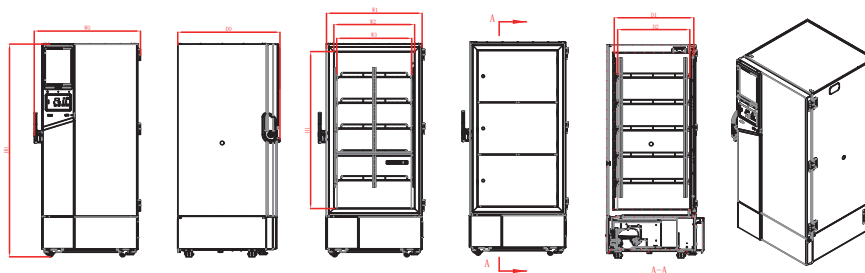

Ramark
 W0=Total Width
 W1=Freezer Width
 W2=Inner Cabinet Width
 W3=Inner Cabinet Shelf Width
 D0=Total Depth
 D1=Inner Cabinet Depth
 D2=Inner Cabinet Shelf Depth
 H0=Total Height
 H1=Inner Cabinet Height

Model	Code	W0	W1	W2	W3	D0	D1	D2	H0	H1
DW-40L818BPT		988mm	890mm	750mm	698mm	951mm	755mm	671mm	1980mm	1460mm

원문: Haier Biomedical DW-40L818BPT DW-40L818BPT · 제조사 원문 자료입니다. 사양은 제조사 사정에 따라 변경될 수 있습니다.

-40°C Smart Frequency Conversion Freezer

Specifications



Model			DW-40L818BPT
Technical Data	Cabinet Type		Upright
	Climate Class		SNN
	Cooling Type		Direct cooling
	Defrost Mode		Manual
	Refrigerant		HC
	Sound Level (dB(A))		44
Performance	Cooling Performance (°C)		-40
	Temperature Range(°C)		-20~-40
Control	Controller		Microprocessor
	Display		Touch Screen LCD
Electrical Data	Power Supply (V/HZ)		100~230/50/60
	Electrical Current (A)		7.9
Dimensions	Capacity (L/Cu.Ft)		818/28.9
	Net/Gross Weight (approx)	(kg)	210/240
		(lbs)	463.0/529.1
	Interior Dimension (W*D*H)	(mm)	750*755*1460
		(in)	29.5/29.7/57.5
	Exterior Dimension (W*D*H)	(mm)	988*951*1980
		(in)	38.9/37.4/78.0
	Packing Dimension (W*D*H)	(mm)	1040*1035*2110
		(in)	40.9*40.7*83.1
Alarms	Container Load (20'/40'/40'H)		10/22/22
	High/Low Temperature		Y
	Remote Alarm		Y
	Power Failure		Y
	Sensor Error		Y
	Low Battery		Y
	High Ambient Temperature		Y
	Dirty Condenser		N
Accessories	Door Ajar		Y
	Caster		Y
	Leveling Feet		Y
	Porthole		Y
	Drawers/Inner Doors		N/3
	Adjustable Shelves		Y (5)
	USB Interface		Optional
	RS485		Y
	NFC		Optional
Other	Temperature Recorder		Optional
	Certificate		CE, UL

*Haier Biomedical reserves the right to change products and specifications without prior notice.

원문: Haier Biomedical DW-40L818BPT DW-40L818BPT · 제조사 원문 자료입니다. 사양은 제조사 사정에 따라 변경될 수 있습니다.