

Haier Biomedical
Intelligent Protection of Life Science

-40°C Biomedical Freezer



DW-40L92

Scope of Application:

Designed to store vaccines, blood plasma and many other biological materials. Installations can be found in research institutions and clinical sites in the life science, pharma, biotech, medical and electronics sectors.

Innovative Design

- ◉ Environmentally Friendly
- ◉ Hydrocarbon (HC) Energy-saving
- ◉ Low Noise
- ◉ Security Lock

Qingdao Haier Biomedical Co.,Ltd.

No.280 Feng Yuan Road, High-tech Zone,
Qingdao, 266109, P.R. China
E-mail: inquiry@haierbiomedical.com
Website: www.haiermedical.com



Haier Biomedical
International



Haier Biomedical
International



@haiermedicalint



Haier Biomedical
International



Haier Biomedical
International

원문: Haier Biomedical DW-40L92 DW-40L92 · 제조사 원문 자료입니다. 사양은 제조사 사정에 따라 변경될 수 있습니다.

Haier Biomedical

Intelligent Protection of Life Science

-40°C Biomedical Freezer



Product Advantages



Low Noise

Optimized hydrocarbon system and structural noise reduction design, DW-40L92 noise 29 dB, super quiet and low noise.



Environmentally Friendly

- The HC system is a completely green refrigeration solution.
- With LBA foamed polyurethane insulation in line with European ROHS directive for environmentally friendly materials.



Hydrocarbon (HC) Energy-saving

DW-40L92 adopts an hydrocarbon inverter compressor system, energy-saving and efficient, delivers a power consumption as low as 1.42KW·h/24h.



Security Lock

- Mechanical lock plus lock catch, the mechanical door lock can be opened with one key, and the door lock can be padlocked.
- Secure and safe, suitable for multiple users.



Product Features



Undercounter Biomedical Freezer

The DW-40L92 cabinet is designed with a height of 810mm, which can be easily placed under the bench to save storage space.



Porthole

Standard access port (25mm inside diameter) on the left side of the unit, convenient for users to test independently.



Microprocessor

- Microprocessor electronic temperature controller, LCD digital temperature display, display precision is 0.1°C, temperature set point -20~-40°C.
- Multiple alarms including high and low temperature, sensor error, power failure, door ajar, high ambient and remote alarm.
- Alarm mode: sound and light alarm.
- It can be connected to remote alarm.



Fast Pull Down and Recovery Times

DW-40L92 cools down to -40°C from 25°C ambient in around 110 minutes due to the optimised HC refrigeration system.



Multiple Interface Options

- Standard configuration: Remote alarm interface.
- Optional configuration: USB or RS485.




Low Energy Consumption

The power consumption of DW-40L92 decreases from 3.3 KW·h/day to 1.42 KW·h/day, and the energy consumption is reduced by more than 50%.



Product Dimension Drawings

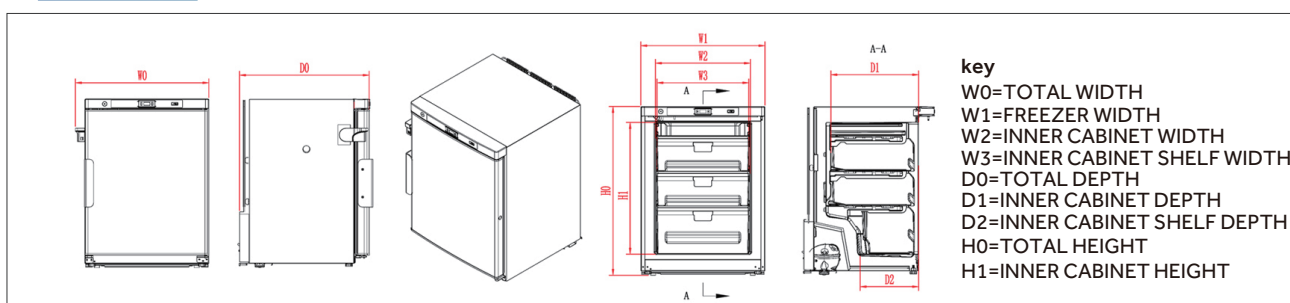

Model	W0	W1	W2	W3	D0	D1	D2	H0	H1
DW-40L92	640	597	435	410	610	410	294	810	635

*Haier Biomedical reserves the right to change products and specifications without prior notice.

원문: Haier Biomedical DW-40L92 DW-40L92 · 제조사 원문 자료입니다. 사양은 제조사 사정에 따라 변경될 수 있습니다.

Haier Biomedical

Intelligent Protection of Life Science

-40°C Biomedical Freezer



Product Parts

Lock

Lock catch

The new thermostat displays precision is 0.1

USB is optional

Door switch

Equipped with remote alarm terminal



Specifications

Model			DW-40L92
Technical Data	Cabinet Type		Upright
	Climate Class		SN N
	Cooling Type		Direct Cooling
	Defrost Mode		Manual
	Refrigerant		HC
Performance	Sound Level (dB(A))		29
	Cooling performance (°C)		-40
	Temperature Range (°C)		-20~-40
Control	Controller		Microprocessor
	Display		LCD
Electrical Data	Power Supply (V/Hz)		220-240/50/60
	Electrical Current (A)		2.2
	Capacity (L/Cu.Ft)		92/3.3
Dimensions	Net/Gross Weight (approx)	kg	46/51
		lbs	101.4/112.4
	Interior Dimension (W*D*H)	mm	435*410*635
		in	17.1*16.1*25.0
	Exterior Dimension (W*D*H)	mm	640*610*810
		in	25.2*24.0*31.9
	Packing Dimension (W*D*H)	mm	660*700*910
		in	26.0*27.6*35.8
Alarms	Container Load (20'/40'/40'H)		48/108/108
	High/Low Temperature		Y
	Remote Alarm		Y
	Power Failure		Y
	Sensor Error		Y
	Low Battery		N
	High Ambient Temperature		N
	Dirty Condenser		N
	Door Ajar		Y
	Caster		Y
Accessories	Leveling Feet		Y
	Porthole		Y
	Drawers/Inner Doors		3/N
	Adjustable Shelves		N
	USB Interface		Optional
	RS485		Optional
	NFC		N
Others	Temperature Recorder		N
	Certification		CE

*Product appearance and specifications are subject to change without notice.

원문: Haier Biomedical DW-40L92 DW-40L92 · 제조사 원문 자료입니다. 사양은 제조사 사정에 따라 변경될 수 있습니다.