

Haier Biomedical
Intelligent Protection of Life Science



DW-30L818

Large Capacity -30°C Biomedical Freezer

Typical Installation and Application

For use in blood banks, hospitals, research institutions, electronics, chemical and other industries, for the preservation of plasma and biological products and cryogenic test of components and materials.



Energy efficient hydrocarbon (HC) refrigeration system

Optimised refrigeration system, utilising high-efficiency HC compressor significantly reduces energy consumption.



Greener by design

HC refrigerants are natural non-toxic and more environmentally friendly than HFC refrigerants. This alongside the HC compressor technology and LBA foamed polyurethane insulation layer, make this unit greener and in-line with European ROHS directives and environmental protection guidelines.



Large capacity, superior uniformity

Built-in evaporator for faster cooling speed and uniform temperature throughout the cabinet, $\pm 3^{\circ}\text{C}$. Large internal space with adjustable shelves for flexible configuration.



Low noise

Optimised system and cabinet design ensures low noise emissions, less than 44dB.

Qingdao Haier Biomedical Co.,Ltd.

No.280 Feng Yuan Road, High-tech Zone,
Qingdao, 266109, P.R. China
E-mail: inquiry@haierbiomedical.com
Website: www.haiermedical.com



Haier Biomedical
International



Haier Biomedical
International



@haiermedicalint



Haier Biomedical
International



Haier Biomedical
International

원문: Haier Biomedical DW-30L818 DW-30L818 · 제조사 원문 자료입니다. 사양은 제조사 사정에 따라 변경될 수 있습니다.

Product Features



Microprocessor control system

- Microcomputer electronic thermostat, LCD temperature display, display precision 0.1°C, inside temperature set point -10~-30°C (adjustable).
- Multiple alarm functions including high temperature alarm, low temperature alarm, sensor fault alarm, power off alarm, open door alarm, high ambient temperature alarm.
- Sound and light alarm mode can be connected to a remote alarm interface.
- Battery backup alarm function operates continuously for >24hr in the event of a power outage.
- Standard configuration: RS485 port.
- Optional USB interface and temperature logger.



Superior thermal insulation performance

70mm super thick insulation layer design, double door seals plus three inner doors, superior thermal insulation and energy saving effect.



Porthole

Portholes as standard, allows for independent testing of cabinet temperature.



Security lock

Built-in lock and padlock available, convenient and safe for multiple users or independent management as needed.

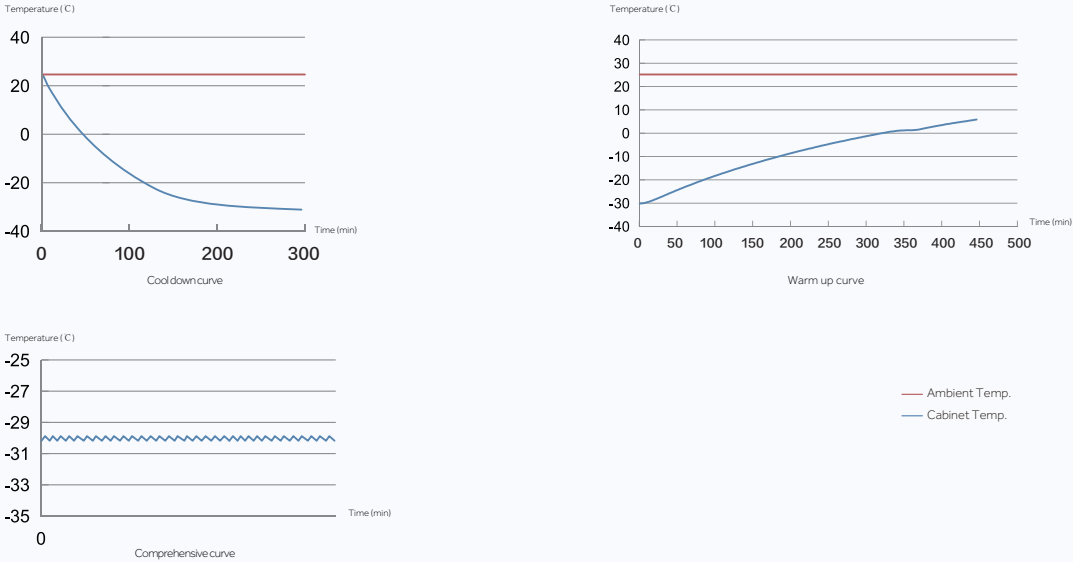


Chart recorder


Optional chart recorder for temperature records.

원문: Haier Biomedical DW-30L818 DW-30L818 · 제조사 원문 자료입니다. 사양은 제조사 사정에 따라 변경될 수 있습니다.

Typical Performance Characteristics in 25 °C Ambient: DW-30L818



Product Dimension Drawing

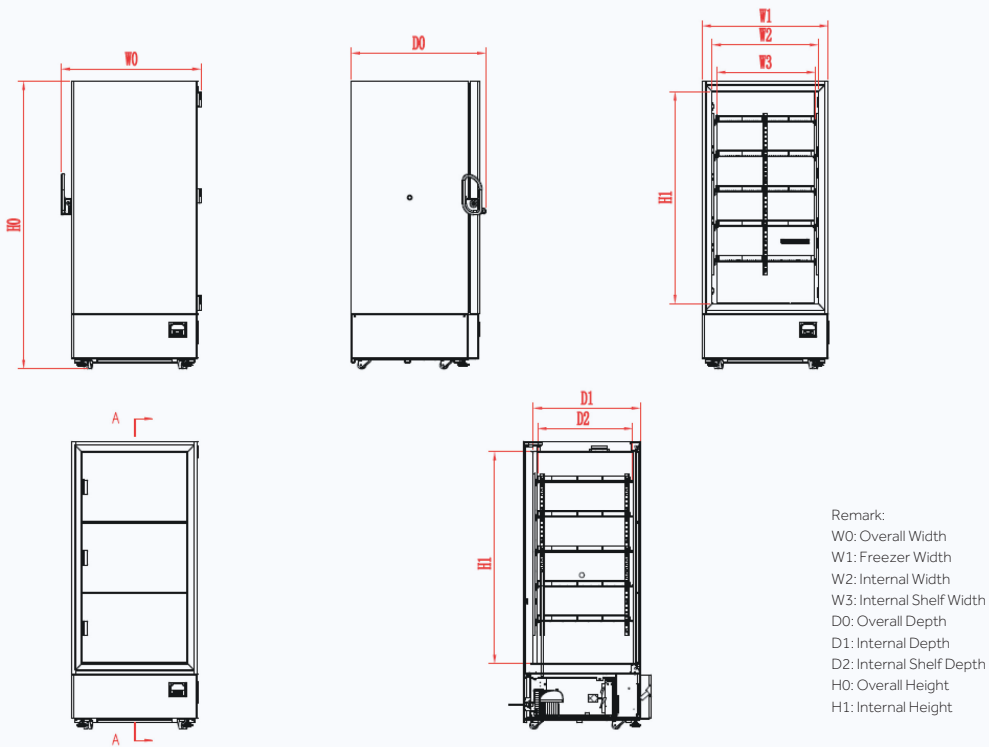

Remark:
W0: Overall Width
W1: Freezer Width
W2: Internal Width
W3: Internal Shelf Width
D0: Overall Depth
D1: Internal Depth
D2: Internal Shelf Depth
H0: Overall Height
H1: Internal Height

CODE MODEL	W0	W1	W2	W3	D0	D1	D2	H0	H1
DW-30L818	988mm	890mm	750mm	698mm	951mm	755mm	671mm	1980mm	1460mm

원문: Haier Biomedical DW-30L818 DW-30L818 · 제조사 원문 자료입니다. 사양은 제조사 사정에 따라 변경될 수 있습니다.

Specifications



Model		DW-30L818	
Technical Data	Cabinet Type	Upright	
	Climate Class	SN N	
	Cooling Type	Direct Cooling	
	Defrost Mode	Manual	
	Refrigerant	HC	
	Sound Level (dB(A))	44	
Performance	Cooling Performance (°C)	-30	
	Temperature Range(°C)	-10~-30	
Control	Controller	Microprocessor	
	Display	LCD	
Electrical Data	Power Supply (V/HZ)	220~240/50	
	Electrical Current (A)	2.8	
Dimensions	Capacity (L/Cu.Ft)	818/28.9	
	Net/Gross Weight (approx)	(kg)	205/235
		(lbs)	451.9/518.1
	Interior Dimension (W*D*H)	(mm)	750*755*1460
		(in)	29.5/29.7/57.5
	Exterior Dimension (W*D*H)	(mm)	988*951*1980
		(in)	38.9/37.4/78.0
	Packing Dimension (W*D*H)	(mm)	1040*1035*2110
		(in)	40.9*40.7*83.1
Alarms	Container Load (20'/40'/40'H)	10/22/22	
	High/Low Temperature	Y	
	Remote Alarm	Y	
	Power Failure	Y	
	Sensor Error	Y	
	Low Battery	N	
	High Ambient Temperature	Y	
	Dirty Condenser	N	
Accessories	Door Ajar	Y	
	Caster	Y	
	Leveling Feet	Y	
	Porthole	Y	
	Drawers/InnerDoors	Optional/3	
	Adjustable Shelves	Y (5)	
	USB Interface	Optional	
	RS485	Optional	
	NFC	N	
Other	Temperature Recorder	Optional	
	Certificate	CE	

*Haier Biomedical reserves the right to change products and specifications without prior notice.

원문: Haier Biomedical DW-30L818 DW-30L818 · 제조사 원문 자료입니다. 사양은 제조사 사정에 따라 변경될 수 있습니다.