

Haier Biomedical
Intelligent Protection of Life Science



DW-25L262

-25°C Biomedical Freezer



Hydrocarbon (HC) Energy-saving

DW-25L262 adopts an efficient hydrocarbon (HC) compressor and optimized refrigeration system, with power consumption as low as 0.73KW·h/24h.



Environmentally Friendly

The HC system is a completely green refrigeration solution. With LBA foamed polyurethane insulation in line with European ROHS directive for environmentally friendly materials.



Low Noise

Optimized hydrocarbon system and structural noise reduction design, DW-25L262 noise 34 dB, super quiet and low noise.



Security Lock

Mechanical lock plus lock catch, the mechanical door lock can be opened with one key, and the door lock can be padlocked. Secure and safe, suitable for multiple users.

Qingdao Haier Biomedical Co.,Ltd.

No.280 Feng Yuan Road, High-tech Zone,
Qingdao, 266109, P.R. China
E-mail: inquiry@haierbiomedical.com
Website: www.haiermedical.com



Haier Biomedical
International



Haier Biomedical
International



@haiermedicalint



Haier Biomedical
International



Haier Biomedical
International

원문: Haier Biomedical DW-25L262 DW-25L262 · 제조사 원문 자료입니다. 사양은 제조사 사정에 따라 변경될 수 있습니다.

Haier Biomedical

Intelligent Protection of Life Science


-25°C Biomedical Freezer DW-25L262

Product Features



Microprocessor

- Microprocessor electronic temperature controller, LCD digital temperature display, display precision is 0.1° C, interior temperature set point -10~-25°C.
- Multiple alarms including high and low temperature, sensor error, power failure, door ajar, high ambient and remote alarm.
- Alarm mode: sound and light alarm.
- It can be connected to remote alarm.

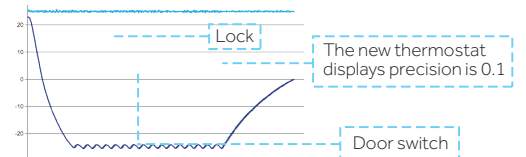

Hydrocarbon System

Increasing cooling rate, reducing energy consumption and lowering noise



Porthole

There is a standard access port (25mm inside diameter) on the left side of the unit, which is convenient for users to test independently.



Multiple Interface Options

- Standard configuration: Remote alarm interface.
- Optional configuration: RS485.



CODE MODEL		W0	W1	W2	W3	D0	D1	D2	H0	H1
DW-25L262		700mm	657mm	480mm	450mm	705mm	465mm	313mm	1665mm	1430mm

Key

W0=TOTAL WIDTH
 W1=FREEZER WIDTH
 W2=INNER CABINET WIDTH
 W3=INNER CABINET SHELF WIDTH
 D0=TOTAL DEPTH
 D1=INNER CABINET DEPTH
 D2=INNER CABINET SHELF DEPTH
 H0=TOTAL HEIGHT
 H1=INNER CABINET HEIGHT

Specifications



Model			DW-25L262
Technical Data	Cabinet Type		Upright
	Climate Class		SN N
	Cooling Type		Direct Cooling
	Defrost Mode		Manual
	Refrigerant		HC
	Sound Level (dB(A))		34
Performance	Cooling Performance (°C)		-25
	Temperature Range(°C)		-10~-25
Control	Controller		Microprocessor
	Display		LCD
Electrical Data	Power Supply (V/HZ)		220~240/50
	Electrical Current (A)		1.4
Dimensions	Capacity (L/Cu.Ft)		262/9.3
	Net/Gross Weight (approx)	(kg)	88/93
		(lbs)	194.0/205.0
	Interior Dimension (W*D*H)	(mm)	480*465*1430
		(in)	18.9*18.3*56.3
	Exterior Dimension (W*D*H)	(mm)	700*705*1665
		(in)	27.6*27.8*65.6
	Packing Dimension (W*D*H)	(mm)	775*760*1880
		(in)	30.5*29.9*74.0
Alarms	Container Load (20'/40'/40'H)		21/45/45
	High/Low Temperature		Y
	Remote Alarm		Y
	Power Failure		Y
	Sensor Error		Y
	Low Battery		N
	High Ambient Temperature		Y
	Dirty Condenser		N
Accessories	Door Ajar		Y
	Caster		Y
	Leveling Feet		Y
	Porthole		Y
	Drawers/InnerDoors		7/N
	Adjustable Shelves		N
	USB Interface		Optional
	RS485		Optional
	NFC		N
Other	Temperature Recorder		N
	Certificate		CE

*Haier Biomedical reserves the right to change products and specifications without prior notice.

원문: Haier Biomedical DW-25L262 DW-25L262 · 제조사 원문 자료입니다. 사양은 제조사 사정에 따라 변경될 수 있습니다.