

PRODUCT SPECIFICATIONS

Model	HLR-118SF	HLR-310SF	HLR-310FL
Parameters			
Technical Data	Type	Under-Counter	Upright
	Climate Class	NL ST	NL ST
	Cooling Type	Forced Air Cooling	Forced Air Cooling
	Defrost Mode	Auto	Auto
	Refrigerant	R134a	R600a
Performance	Noise (dB(A))	38	40
	Temperature Range (°C)	3-16°C Adjustable	3-16°C Adjustable
	Ambient Temperature (°C)	16-38°C	16-38°C
Control	Controller	Microprocessor	Microprocessor
	Display	LED	LED
Electrical Data	Power Supply (V/HZ)	220/50	220/50
	Power (W)	140	210
	Electrical Current (A)	1.03	1.26
Dimension	Capacity (L/Cu.Ft)	118/4.2	310/10.9
	Net/Gross Weight (approx)	44/49	72/83
	Interior Dimension (W*D*H)	515*415*630	560*500*1290
	Exterior Dimension (W*D*H)	597*453*810	600*598*1840
	Packing Dimension (W*D*H)	700*710*930	680*690*1940
	Container Load (20'/40'/40'H)	48/96/96	24/51/51
	High/Low Temperature	Y	Y
	Sensor Error	Y	Y
	Door Alarm	Y	Y
	Caster	2	4
Accessories	Foot	2	2
	Shelves/Baskets	2/1	4/0
	Water tray	1	1
Others	Padlock Adapter Kit/Quantity	/	1
	Built-in Key Door Lock/Quantity	1	1
Others			
Temperature Setting Mode	Password Protection	Password Protection	Password Protection
Temperature Sensor	1 Resistance Thermometer	1 Resistance Thermometer	1 Resistance Thermometer
Power Consumption (kWh/24h)	0.56	1.05	1.05
Materials			
Exterior Material	Sprayed Cold Plate	Sprayed Cold Plate	Sprayed Cold Plate
Interior Material/Colour	PS Plate/White	PS Plate/White	Antistatic PS Plate/Black
Insulation	Cyclopentane/Isopentane	Cyclopentane/Isopentane	Cyclopentane/Isopentane
Outside Door/Quantity	Foaming Door/1	Foaming Door/1	Foaming Door/1
Outside Door Sealing Structure	Sealing Strip	Sealing Strip	Sealing Strip
Shelves Material/Quantity	Tempered Glass/2	Tempered Glass/4	Tempered Glass/4
Adjustable Shelves	Y	Y	Y
Function Parameters			
Alarm System	Y	Y	Y
Boot Delay Protection	Y	Y	Y
Display Screen Password Protection	Y	Y	Y
Compressor			
Compressor Type	Fully Closed	Fully Closed	Fully Closed
Brand	Secop	Danper	Danper
Compressor Power(W)	172	138	138
Compressor Quantity	1	1	1
Condenser			
Type(Forced Cooling)	Back Condenser	Wire and Tube Forced Condenser	Wire and Tube Forced Condenser
Material(Forced Cooling)	Steel Tube	Steel Tube	Steel Tube
Outside Fan	No	EBM	EBM
Internal Temperature Uniformity	±3	±3	±3
Internal Temperature Accuracy	1	1	1

Haier Biomedical

Intelligent Protection of Life Science

Sparkfree Refrigerators

ATEX Certified



Haier Biomedical's range of ATEX II C-T6 Explosion Proof certified laboratory refrigerators.



360° Explosion Proof Interior with ATEX II C-T6 EU Explosion Proof Certification.



Setting Temperature Range +3°C to +16°C with precise control, keeps internal temperature variation within 3°C for great temperature uniformity.



Clear and Complete Alarm System with One Key Search multiple alarms and data function which allows users to check and save historical data, which is useful and convenient for laboratory inspection processes.

Qingdao Haier Biomedical Co., Ltd.

No. 280 Fang Yuan Road, High-tech Zone,
Qingdao, 266109, P.R. China
E-mail: inquiry@haierbiomedical.com
Website: www.haierbiomedical.com



Haier Biomedical International



Haier Biomedical International



@haierbiomedical



Haier Biomedical International



Haier Biomedical International

원문: Haier Biomedical Sparkfree Refrigerators Sparkfree Refrigerators · 제조사 원문 자료입니다. 사양은 제조사 사정에 따라 변경될 수 있습니다.

Safer by Design

The new sparkfree laboratory refrigerator, developed in-house, offers 360° internal explosion protection and is fully compliant and certified to the ATEX II C-T6 EU standard. This is one of the highest ATEX rated refrigerators available to life science customers, requiring a safety barrier to protect the temperature sensor. Utilising a zener barrier, the new sparkfree laboratory refrigerators use quick fuse, a current

limiting resistance or voltage limiting diode. This limits the input of electrical energy to ensure that the sensor will not be a source of ignition for flammable and explosive substances in the cabinet. This is different from other sparkfree refrigerators, ensuring that the Haier Biomedical units are safer by design. This means that these appliances can be used in zone 2 environments.



ATEX II C-T6 EU Explosion Proof Certified
Our 360° all-around explosion proof system uses an antistatic liner, gasket and explosion proof fan motor. It is also equipped with an overcurrent and overvoltage protection system. All components within the unit are earthed to ensure static is discharged safely.



Safe and Secure
Refrigerator doors have a built-in lock and are also equipped with an adapter kit to allow user to add a padlock. The control panel is lockable to prevent anyone turning off the unit by mistake or adjusting the temperature by accident.



Multiple Alarms
The refrigerator comes with hi/low temperature alert, door open alarm, sensor error and optional power failure alarm. Optional remote alarm contacts ensure the unit can be monitored remotely and will rapidly alert users when in an alarm state.



Low Noise Design
Designed to keep noise to a minimum, the refrigerators have a noise level of below 40dB, creating a quieter working environment.



Energy Efficient Design
The carbon-hydrogen cooling system doubles the cooling efficiency and saves half the energy when compared to traditional refrigerants. In addition, the cabinet is fitted with an energy saving explosion proof fan.



Toughened Glass Shelves
Adjustable, toughened glass shelves with 40kg capacity allows user to store different sizes of reagents.

PRODUCT ADVANTAGES



Cabinet Structure



Glass Shelf



ATEX Certification Label




Explosion Proof Cabinet/Fan

ATEX Certification

Haier Biomedical sparkfree refrigerators are ATEX certified in the application range II 3G Ex nA II T6. This means that the appliances can be found in the whole 2 zone environment, making our range one of the safest laboratory grade refrigerators available.

Explosive Proof Rating				
I Coal mine (gas)				
hydrogen water gas	ethyne	carbon disulfide	ethyl nitrate	
II B	Allylene Acrylonitrile dimethyl ether hydrogen cyanide city gas	butadiene epoxy acetylene Ethylene furan	dimethyl ether Acrolein hydrogen sulfide	butyl oxide diethyl ether Ethyl methyl ether tetrafluoroethylene
II A	methane , methylbenzene , methyl ester , ethane , dimethylmethane , acetone , acrylic acid , benzene , styrene , carbon dioxide , acetic ether , acetic acid , chlorobenzene , methyl acetate , ammonia	ethyl alcohol , ethylbenzene , propyl alcohol , propylene , butanol , butane , n-butyl acetate , amyl acetate , cyclopentane	Pentane , amyl alcohol , hexane , hexyl alcohol , heptane , octane , cyclohexylbenzene , turpentine oil , naphtha , oil (including gasoline) , fuel oil , Pentamethyl tetrachloride	Acetaldehyde trimethylamine
III Dust environment				
T1(450° C) T2(300° C) T3(200° C) T4(135° C) T5(100° C) T6(85° C) Temperature				

PRODUCT DIMENSION DRAWING

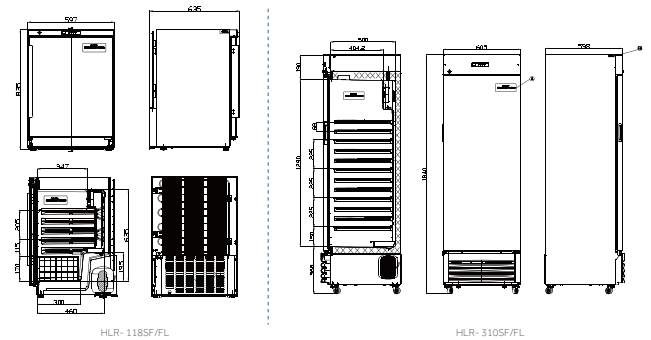

원문: Haier Biomedical Sparkfree Refrigerators Sparkfree Refrigerators · 제조사 원문 자료입니다. 사양은 제조사 사정에 따라 변경될 수 있습니다.