MARATHON PRODUCTS EDL-XYZ Data Logger

Digital Temperature, RH and Vibration Recorder with Large, Easy-to-Read Display

7

The EDL-XYZ multi-use data logger can be used to monitor fragile goods during shipment. It contains a temperature sensor, a high accuracy humidity sensor and a 3-D accelerometer. The latter controls the motion and vibration of a truck during shipment. It can also be used for monitoring machinery wear, vibration, impact and shock for all applications.

FEATURES:

- High accuracy thermistor for temperature measurement.
- High accuracy humidity sensor.
- 3-D accelerometer for motion and vibration detection.
- Alarm for out of limits operation for all sensors.
- Recording time updated on LCD display.
- Flexible recording interval time for temperature and humidity.
- Recording time automatically fixed by firmware for motion and vibration.
- Non-volatile memory for data saving
- Trigger threshold set by user for vibration data saving.
- MaxiThermal vibration software for logger parameters setting and monitoring results.
- LCD display for temperature, humidity, and 3 axis vibration.

Applications:

- Vibration, shock, impact monitoring and data logging.
- Monitoring the transport conditions for fragile goods.
- Monitoring machinery wear.

Waterproof Enclosure:

The product package is hermetically sealed to an IP66 rating.

PRODUCTS, INC.

Temperature Range -29°C to 72°C -20°F to 160°F

MARATHON PRODUCTS

REC

alarm START

Humidity Range 0% to 100%

3-D Accelerometer Range: ±2G; ±4G; ±8G; ±16G Sampling rate: 400 Hz

edloXY7

TEMP / RH / VIBRATION


Memory EEPROM, Storage

Temperature: 8k Humidity: 8k Vibration: 42k



Don't ship without us!

MaxiThermal Software Highlights: Easy-to-use software provides clear graphs. Report Summary & Statistics File Manager, Note Attachment, Zoom, Elapsed Time or Date/Time View, Recorded View, Celsius or Fahrenheit. Data can be exported to other Windows programs such as spreadsheets, word-processing or databases. Available for Windows 98, NT, 2000, ME, XP and Windows 7. An Enterprise Software version and 21CFR Part 11 Compliant Software are available.

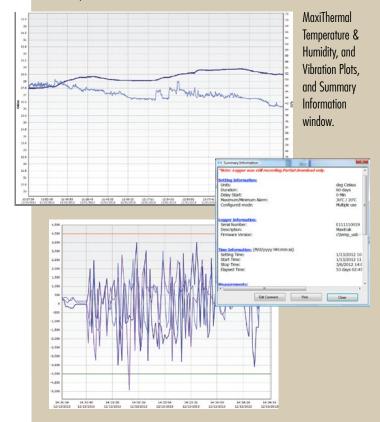

Serialization:

This recorder is programmed at the factory with a unique serial number for positive tracking.

Waterproof Enclosure:

The product package is hermetically sealed to an IP66 rating.

Computer Download Capability:

Recorded data can be easily downloaded via standard USB cable and Marathon's software.

EDL-XYZ Specifications

EDL-XYZ DATA LOGGER SPECIFICATIONS

EDE-XYZ DAIA LUGGEK SPEC	IFICATIONS			
Memory EEPROM, Storage:	Temperature: 8k, Humidity: 8k, Vibration: 42k			
Temperature Range:	-29° C to +72° C / -20° F to +160° F			
Temperature Accuracy:	$\pm 0.2^\circ C$ from 10° to 30°C / $\pm 0.5^\circ C$ at ex $\pm 0.4^\circ F$ from 50° to 86°F / $\pm 0.9^\circ F$ at ex			
Thermal Sensor:	Wired Chip in Glass Thermistor			
Temperature Resolution:	0.1°C / 0.4°F			
Measurement Intervals: 4 days 7 Days 16 Days 30 Days 60 Days 90 Days	Programmable from 2 Temp/RH - 8K 0 min. 43 sec. 1 min. 15 sec. 2 min. 50 sec. 5 min. 18 sec. 10 min. 36 sec. 15 min. 54sec.	Vibrati O min. O min. O min. 1 min. 1 min.	months. on - 42k 8 sec. 14 sec. 32 sec. 0 sec. 59 sec. 59 sec.	
365 Days	15 mm. 54sec. 1hr. 4 min. 28 sec.		n. 2 sec.	
, Humidity Range:	0% to 100%			
Humidity Accuracy:	$\pm 3\%$ RH from 25% to 75%, $\pm 5\%$ RH at extremes			
Humidity Sensor:	Capacitive Cell			
3-D Accelerometer	Range: ±26; ±46; ±86; ±166 Sampling rate: 400 Hz Accuracy: ±0.056 for 0 to 166 Resolution: ±0.016 for 0 to 166			
High and Low Alarm Limits:	LED display set for temperature, humidity and vibration			
Computer Interface:	Mini USB Connector			
Internal Software Provides:	Start time, Interval, User description, Alarm values, Recording status, Measurement data, Software version, Serial number, Model type			
Power Source:	One CR2477 Lithium Battery with a 1 year operating life and a 5 year shelf life.			
Size:	Length 9.0 cm / 3.5 in.	Width 5 cm / 1.9	96 in.	Depth 2.8 cm / 1.1 in.
Weight:	90 g / 2.6 oz.			
Warranty:	12 months			
CE Certified:	CE Marking File			

Please call 1-510-562-6450 for more information or to place an order.

www.marathonproducts.com

627 McCormick St., San Leandro, CA 94577 • sales@marathonproducts.com

"Specifications subject to change without prior notice."

rev.04022015