MultiConnect® microCell

MTCM2-L4G1D-B03 User Guide

www.multitech.com

원문: MultiTech MultiConnect® microCell 사용설명서(영문) · 제조사 원문 자료입니다. 사양은 제조사 사정에 따라 변경될 수 있습니다.

MultiConnect microCell User Guide

Model: MTCM2-L4G1D-B03

Part Number: S000806 1.0

Copyright

This publication may not be reproduced, in whole or in part, without the specific and express prior written permission signed by an executive officer of Multi-Tech Systems, Inc. All rights reserved. **Copyright © 2022 by Multi-Tech Systems, Inc.**

Multi-Tech Systems, Inc. makes no representations or warranties, whether express, implied or by estoppels, with respect to the content, information, material and recommendations herein and specifically disclaims any implied warranties of merchantability, fitness for any particular purpose and non-infringement.

Multi-Tech Systems, Inc. reserves the right to revise this publication and to make changes from time to time in the content hereof without obligation of Multi-Tech Systems, Inc. to notify any person or organization of such revisions or changes.

Trademarks

MultiTech®, the MultiTech logo, and MultiConnect are registered trademarks of Multi-Tech Systems, Inc. All other brand and product names are trademarks or registered trademarks of their respective companies.

Legal Notices

The MultiTech products are not designed, manufactured or intended for use, and should not be used, or sold or re-sold for use, in connection with applications requiring fail-safe performance or in applications where the failure of the products would reasonably be expected to result in personal injury or death, significant property damage, or serious physical or environmental damage. Examples of such use include life support machines or other life preserving medical devices or systems, air traffic control or aircraft navigation or communications systems, control equipment for nuclear facilities, or missile, nuclear, biological or chemical weapons or other military applications ("Restricted Applications"). Use of the products in such Restricted Applications is at the user's sole risk and liability.

MULTITECH DOES NOT WARRANT THAT THE TRANSMISSION OF DATA BY A PRODUCT OVER A CELLULAR COMMUNICATIONS NETWORK WILL BE UNINTERRUPTED, TIMELY, SECURE OR ERROR FREE, NOR DOES MULTITECH WARRANT ANY CONNECTION OR ACCESSIBILITY TO ANY CELLULAR COMMUNICATIONS NETWORK. MULTITECH WILL HAVE NO LIABILITY FOR ANY LOSSES, DAMAGES, OBLIGATIONS, PENALTIES, DEFICIENCIES, LIABILITIES, COSTS OR EXPENSES (INCLUDING WITHOUT LIMITATION REASONABLE ATTORNEYS FEES) RELATED TO TEMPORARY INABILITY TO ACCESS A CELLULAR COMMUNICATIONS NETWORK USING THE PRODUCTS.

The MultiTech products and the final application of the MultiTech products should be thoroughly tested to ensure the functionality of the MultiTech products as used in the final application. The designer, manufacturer and reseller has the sole responsibility of ensuring that any end user product into which the MultiTech product is integrated operates as intended and meets its requirements or the requirements of its direct or indirect customers. MultiTech has no responsibility whatsoever for the integration, configuration, testing, validation, verification, installation, upgrade, support or maintenance of such end user product, or for any liabilities, damages, costs or expenses associated therewith, except to the extent agreed upon in a signed written document. To the extent MultiTech provides any comments or suggested changes related to the application of its products, such comments or suggested changes is performed only as a courtesy and without any representation or warranty whatsoever.

Contacting MultiTech

Sales	Support
sales@multitech.com	support@multitech.com
(763) 785-3500	(763) 717-5863

Website

www.multitech.com

Knowledge Base

For immediate access to support information and resolutions for MultiTech products, visit http://www.multitech.com/kb.go.

Support Portal

To create an account and submit a support case directly to our technical support team, visit: https://support.multitech.com.

Warranty

To read the warranty statement for your product, visit https://www.multitech.com/legal/warranty.

World Headquarters

Multi-Tech Systems, Inc.

2205 Woodale Drive, Mounds View, MN 55112

원문: MultiTech MultiConnect® microCell 사용설명서(영문) · 제조사 원문 자료입니다. 사양은 제조사 사정에 따라 변경될 수 있습니다.

Contents

Chapter 1 – Product Overview 5
About the MultiConnect microCell Modem 5
Documentation Overview 5
Dimensions 6
MTCM2-L4G1D-B03 Specifications 7
Side Panels and Connectors 8
Side Panels 8
Connectors 8
LED Descriptions 9
MTCM2-L4G1D Power Draw 10
Chapter 2 – Safety Warnings 11
Radio Frequency (RF) Safety 11
Sécurité relative aux appareils à radiofréquence (RF) 11
Interference with Pacemakers and Other Medical Devices 12
Potential interference 12
Precautions for pacemaker wearers 12
Chapter 3 – Installing Drivers 13
Installing Windows Drivers 13
Chapter 4 – Installing the Device 14
Installing a SIM Card 14
Removing a SIM Card 14
Installing the Device 14
Mounting Device to Flat Surface 15
Troubleshooting the Connection 15
Next Steps 16
Chapter 5 – Configuring and Communicating with Your Device 17
Before Using the Device 17
Using Command Mode and Online Data Mode 17
Device Phone Number 17
Dual Carrier Firmware for Cellular Radio 18
Adding APN value 18
Verizon FOTA (Firmware Over the Air) 19
Verifying Signal Strength 19
Example 20
Checking Network Registration 20
Reading, Writing and Deleting Messages 20
Reading Text Messages 20

원문: MultiTech MultiConnect® microCell 사용설명서(영문) · 제조사 원문 자료입니다. 사양은 제조사 사정에 따라 변경될 수 있습니다.

CONTENTS

Deleting Messages 21

Chapter 6 – Antenna Information 22

Notice regarding Compliance with FCC, EU, and Industry Canada Requirements for RF Exposure 22

Antenna System Cellular Devices 22

Antenna 22

Antenna Specifications 23

LTE Antenna MISO 23

Selecting Antennas 23

Antenna Approvals and Safety Considerations 23

Power Draw 23

Chapter 7 – Regulatory Information 24

47 CFR Part 15 Regulation Class B Devices 24

FCC Interference Notice 24

Industry Canada Class B Notice 24

Waste Electrical and Electronic Equipment Statement 25

WEEE Directive 25

Instructions for Disposal of WEEE by Users in the European Union 25

REACH Statement 25

Registration of Substances 25

Restriction of the Use of Hazardous Substances (RoHS) 26

Information on HS/TS Substances According to Chinese Standards 27

Information on HS/TS Substances According to Chinese Standards (in Chinese) 28

Chapter 8 – Using Connection Manager 29

Installing Connection Manager 29

Setting Up a Serial Device in Windows Device Manager 30

Connecting a Device 32

Uninstalling Connection Manager 33

Connection Manager User Interface 33

Main tab 34

Settings tab 35

Connection tab 35

Details tab 35

Terminal tab 35

Charts tab 35

Troubleshooting 35

Serial COM port is not available in the Serial Modem Settings 35

Device is not detected ("No Device") 35

MultiConnect Cell USB Modem is not detected 36

Connection Manager is not working, and a device connected to the computer is not detected 36

Connection Manager displays "Device Error" status for a serial device 36

원문: MultiTech MultiConnect® microCell 사용설명서(영문) · 제조사 원문 자료입니다. 사양은 제조사 사정에 따라 변경될 수 있습니다.

we measure, we calibrate, we validate.
㈜테솔 · www.tessol.com TS-TL-MTC-010 4 / 36
KOLAS 국제공인교정기관 · ISO/IEC 17025

Chapter 1 – Product Overview

About the MultiConnect microCell Modem

The MultiConnect microCell is a compact and simple communications platform that provides cellular capabilities for fixed and mobile applications. It is intended for use in settings such as vending, smart parking, medical, smart inventory tracking equipment and commercial applications.

Documentation Overview

The following documents are available at https://www.multitech.com/brands/multiconnect-microcell. Select your model to find the documents specific for that device.

Document	Description	Part Number
MultiConnect microCell MTCM2-L4G1D-B03 User Guide	Hardware, regulatory, and getting started information.	S000806
MultiConnect microCell MTCM/MTCM2 Quick Start	Steps for getting started. Ships with the device and is available online.	82104702L
Quectel EG25x AT Commands Manual, USB Installation Guides, and other related manuals	Multiple documents listing AT Commands, USB installation guides, and other protocols used to communicate with your L4G1D device. Provided in a zip file.	N/A

원문: MultiTech MultiConnect® microCell 사용설명서(영문) · 제조사 원문 자료입니다. 사양은 제조사 사정에 따라 변경될 수 있습니다.

Dimensions

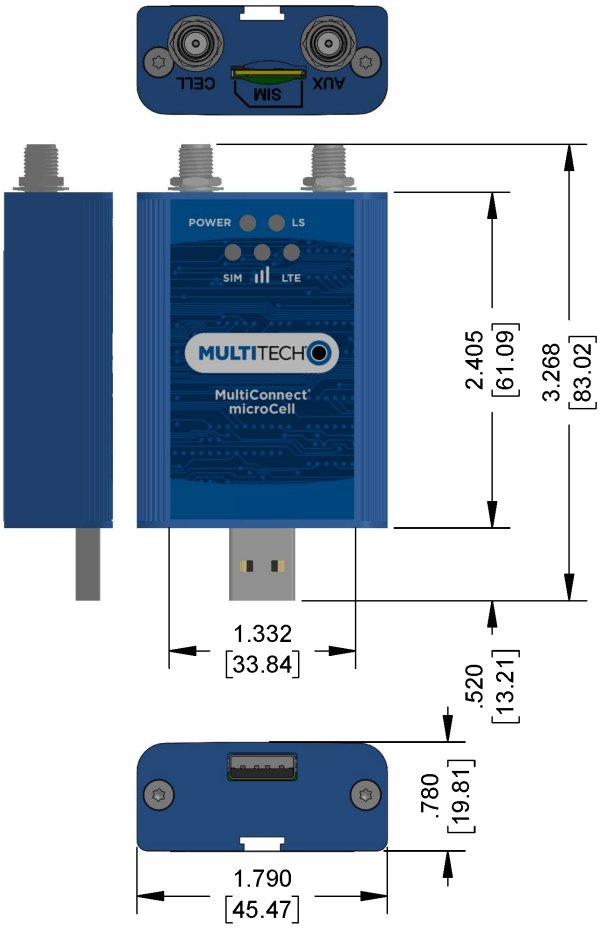

DIMENSIONS IN In [mm]

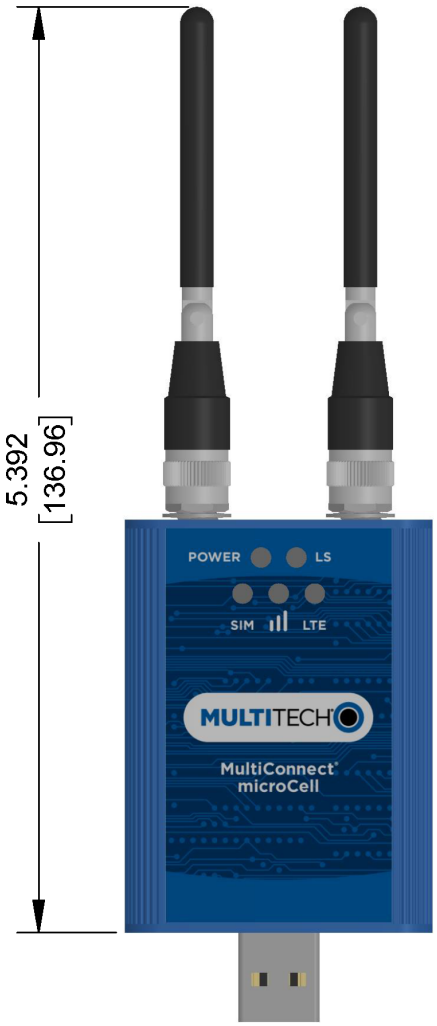

DIMENSIONS IN In [mm]

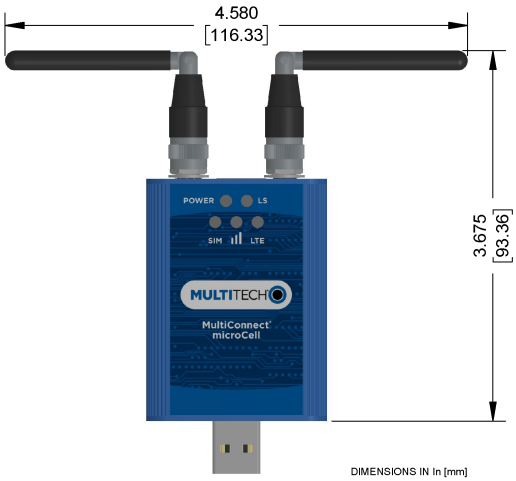

DIMENSIONS IN In [mm]

원문: MultiTech MultiConnect® microCell 사용설명서(영문) · 제조사 원문 자료입니다. 사양은 제조사 사정에 따라 변경될 수 있습니다.

MTCM2-L4G1D-B03 Specifications

Category	Description
General	
Standards	3GPP Rel. 11 LTE
	UMTS/HSPA+
	GSM/GPRS/EDGE
	USB Interface is CDC-ACM compliant
TCP/IP Functions	FTP, SMTP, SSL, TCP, UDP
Frequency Bands	LTE FDD: B1/B2/B3/B4/B5/B7/B8/B12/B13/B18/ B19/B20/B25/B26/B28
	LTE TDD: B38/B39/B40/B41
	WCDMA: B1/B2/B4/B5/B6/B8/B19
	GSM: B2/B3/B5/B8
Speed	
Data Speed	LTE FDD: Max 150Mbps (DL)/Max 50Mbps (UL)
	LTE TDD: Max 130Mbps (DL)/Max 35Mbps (UL)
	UMTS: DC-HSDPA: Max 42Mbps (DL)
	UMTS: HSUPA: Max 5.76Mbps (UL)
	UMTS: WCDMA: Max 384Kbps (DL)/Max 384Kbps (UL)
	GSM: EDGE: Max 296Kbps (DL)/Max 236.8Kbps (UL)
	GSM: GPRS: Max 107Kbps (DL)/Max 85.6Kbps (UL)
Physical Description	
Weight	Device only 2.4 oz (66 g); With antennas 2.9 oz (83 g)
Dimensions	Refer to mechanical drawing for dimensions.
Connectors	
Antenna Connector	2 SMA connectors for cellular
SIM	1.8V and 3V SIM holder for micro-SIM (3FF) card
USB	USB 2.0 with High Speed up to 480 Mbps
Environment	
Operating Temperature	-40° C to +85° C*
Storage Temperature	-40° C to +85° C
Humidity	20%-90% RH, non-condensing
Power Requirements	
Operating Voltage	USB Model: 5 VDC
SMS	

원문: MultiTech MultiConnect® microCell 사용설명서(영문) · 제조사 원문 자료입니다. 사양은 제조사 사정에 따라 변경될 수 있습니다.

Category	Description
SMS	Point-to-Point messaging
	Mobile-Terminated SMS
	Mobile-Originated SMS
Certifications and Compliance	
EMC and Radio Compliance	CE Mark, RED (EU), FCC, RCM, IC
Safety Compliance	IEC 60950-1 2nd ED, IEC 62368-1
Carrier	PTCRB, AT&T, T-Mobile, Verizon

*UL tested to ambient temperature of +60C.

Side Panels and Connectors

Side Panels

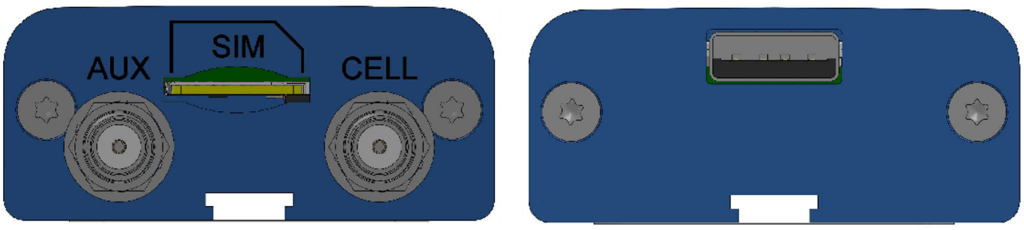

Connectors

The device has the following connectors:

- **USB** 1 USB connector
- **SMA** 2 female SMA connectors, labeled CELL and AUX
- **SIM** 1 micro-SIM slot, between the SMA connectors

원문: MultiTech MultiConnect® microCell 사용설명서(영문) · 제조사 원문 자료입니다. 사양은 제조사 사정에 따라 변경될 수 있습니다.

LED Descriptions

The MTCM2 has the following LEDs:

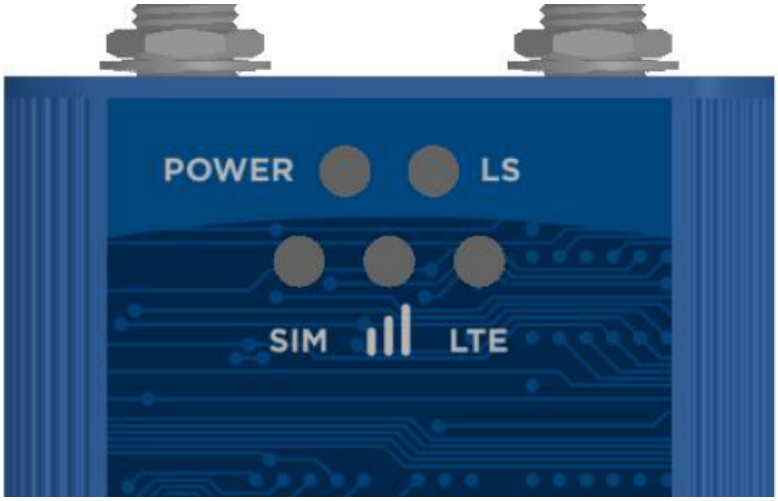

Note:

- Slow is 1 second on 1 second off
- Fast is 200 milliseconds on 200 milliseconds off

LED	Status	Description
Power	On	Device has power
	Off	Device does not have power
Link Status (LS)	On	Radio is not registered
	Flash Slow	Registered
	Off	Radio is turned off, in PSM mode, receiving a firmware update, or SIM is not inserted.
LTE	On	LTE
	Flash Fast	3G
	Flash Slow	2G
	Off	SIM not inserted or radio technology unknown
SIM	On	Ready
	Flash Slow	Other
	Off	SIM not inserted
Signal Strength	On	Excellent
	Flash Fast	Good
	Flash Slow	Fair
	Off	No signal or SIM not inserted

원문: MultiTech MultiConnect® microCell 사용설명서(영문) · 제조사 원문 자료입니다. 사양은 제조사 사정에 따라 변경될 수 있습니다.

MTCM2-L4G1D Power Draw

Note: MultiTech recommends that you incorporate a 10% buffer into your power source when determining product load.

Radio Protocol	3G On/Off Mode Current or Sleep Mode	Live Connection, Idle Current	Cellular Connection Idle, No Data	Measured Current at Max Power[1]	TX Pulse Amplitude Current for Peak Current [2]	Total Inrush Charge [3]	Total Inrush Duration During Power Up
5 Volts							
GSM850	N/A	67 mA	67 mA	354 mA	1.40 A	0.156 mC	26.1 uS
WCDMA Band 2 (1854MHz)	N/A	68 mA	67 mA	512 mA	580 mA	0.156 mC	26.1 uS
LTE Band 1 (1950MHz)	N/A	71 mA	68 mA	721 mA	788 mA	0.156 mC	26.1 uS

Note:

1. Maximum Power: The continuous current during maximum data rate with the radio transmitter at maximum power.
2. TX Pulse: The average peak current during an HSDPA/LTE connection.
3. Inrush Charge: The total inrush charge at power on.

원문: MultiTech MultiConnect® microCell 사용설명서(영문) · 제조사 원문 자료입니다. 사양은 제조사 사정에 따라 변경될 수 있습니다.

we measure, we calibrate, we validate.
KOLAS 국제공인교정기관 · ISO/IEC 17025

Chapter 2 – Safety Warnings

Radio Frequency (RF) Safety

Due to the possibility of radio frequency (RF) interference, it is important that you follow any special regulations regarding the use of radio equipment. Follow the safety advice given below.

- Operating your device close to other electronic equipment may cause interference if the equipment is inadequately protected. Observe any warning signs and manufacturers' recommendations.
- Different industries and businesses restrict the use of cellular devices. Respect restrictions on the use of radio equipment in fuel depots, chemical plants, or where blasting operations are in process. Follow restrictions for any environment where you operate the device.
- Do not place the antenna outdoors.
- Switch OFF your wireless device when in an aircraft. Using portable electronic devices in an aircraft may endanger aircraft operation, disrupt the cellular network, and is illegal. Failing to observe this restriction may lead to suspension or denial of cellular services to the offender, legal action, or both.
- Switch OFF your wireless device when around gasoline or diesel-fuel pumps and before filling your vehicle with fuel.
- Switch OFF your wireless device in hospitals and any other place where medical equipment may be in use.

Sécurité relative aux appareils à radiofréquence (RF)

À cause du risque d'interférences de radiofréquence (RF), il est important de respecter toutes les réglementations spéciales relatives aux équipements radio. Suivez les conseils de sécurité ci-dessous.

- Utiliser l'appareil à proximité d'autres équipements électroniques peut causer des interférences si les équipements ne sont pas bien protégés. Respectez tous les panneaux d'avertissement et les recommandations du fabricant.
- Certains secteurs industriels et certaines entreprises limitent l'utilisation des appareils cellulaires. Respectez ces restrictions relatives aux équipements radio dans les dépôts de carburant, dans les usines de produits chimiques, ou dans les zones où des dynamitages sont en cours. Suivez les restrictions relatives à chaque type d'environnement où vous utiliserez l'appareil.
- Ne placez pas l'antenne en extérieur.
- Éteignez votre appareil sans fil dans les avions. L'utilisation d'appareils électroniques portables en avion est illégale: elle peut fortement perturber le fonctionnement de l'appareil et désactiver le réseau cellulaires. S'il ne respecte pas cette consigne, le responsable peut voir son accès aux services cellulaires suspendu ou interdit, peut être poursuivi en justice, ou les deux.
- Éteignez votre appareil sans fil à proximité des pompes à essence ou de diesel avant de remplir le réservoir de votre véhicule de carburant.
- Éteignez votre appareil sans fil dans les hôpitaux ou dans toutes les zones où des appareils médicaux sont susceptibles d'être utilisés.

원문: MultiTech MultiConnect® microCell 사용설명서(영문) · 제조사 원문 자료입니다. 사양은 제조사 사정에 따라 변경될 수 있습니다.

Interference with Pacemakers and Other Medical Devices

Potential interference

Radio frequency energy (RF) from cellular devices can interact with some electronic devices. This is electromagnetic interference (EMI). The FDA helped develop a detailed test method to measure EMI of implanted cardiac pacemakers and defibrillators from cellular devices. This test method is part of the Association for the Advancement of Medical Instrumentation (AAMI) standard. This standard allows manufacturers to ensure that cardiac pacemakers and defibrillators are safe from cellular device EMI.

The FDA continues to monitor cellular devices for interactions with other medical devices. If harmful interference occurs, the FDA will assess the interference and work to resolve the problem.

Precautions for pacemaker wearers

If EMI occurs, it could affect a pacemaker in one of three ways:

- Stop the pacemaker from delivering the stimulating pulses that regulate the heart's rhythm.
- Cause the pacemaker to deliver the pulses irregularly.
- Cause the pacemaker to ignore the heart's own rhythm and deliver pulses at a fixed rate.

Based on current research, cellular devices do not pose a significant health problem for most pacemaker wearers. However, people with pacemakers may want to take simple precautions to be sure that their device doesn't cause a problem.

- Keep the device on the opposite side of the body from the pacemaker to add extra distance between the pacemaker and the device.
- Avoid placing a turned-on device next to the pacemaker (for example, don’t carry the device in a shirt or jacket pocket directly over the pacemaker).

원문: MultiTech MultiConnect® microCell 사용설명서(영문) · 제조사 원문 자료입니다. 사양은 제조사 사정에 따라 변경될 수 있습니다.

Chapter 3 – Installing Drivers

Installing Windows Drivers

CAUTION: If you connected the device before installing the drivers, Windows may install drivers automatically. Your device may not operate correctly with these drivers. Uninstall the drivers before proceeding.

The driver supports the following Windows versions:.

- Windows 10
- Windows 8
- Windows 7

Before connecting your device.

1. Click on your model's page at https://www.multitech.com/brands/multiconnect-microcell
2. Under the **Downloads** menu, select the Windows USB Driver .zip file.
3. Follow the instructions listed in the pop up window.
4. Click **Download**, and extract .zip file.
5. Click **Open**.
6. Follow instructions in the included .pdf file.

원문: MultiTech MultiConnect® microCell 사용설명서(영문) · 제조사 원문 자료입니다. 사양은 제조사 사정에 따라 변경될 수 있습니다.

Chapter 4 – Installing the Device

Installing a SIM Card

This model requires a SIM card, which is supplied by your service provider. To install the SIM card:

1. Locate the SIM card slot on the side of the modem. The slot is labeled SIM.
2. Slide the SIM card into the SIM card slot with the contact side facing up as shown. When the SIM card is installed, it locks into place.

Removing a SIM Card

To remove the SIM card, push the SIM card in. The device ejects the SIM card.

Installing the Device

Important: Install drivers on your computer before connecting the device.
Important: Install both antennas for diversity.

1. Screw both antennas finger tight on to the SMA connectors, labeled CELL and AUX
2. Angle antennas away from each other. Do not angle antennas parallel each other.

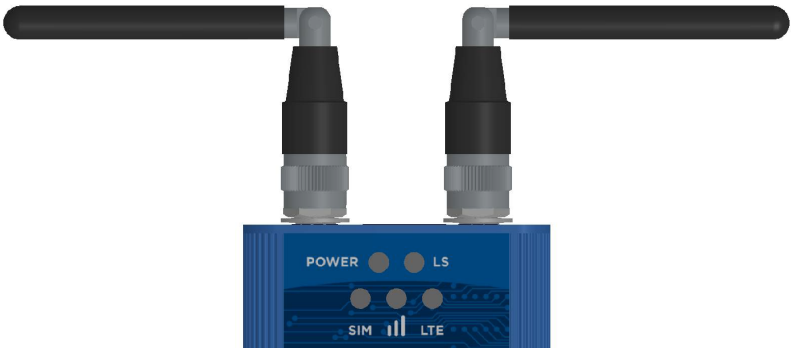

3. Connect the USB connector to your computer or other USB high power device, such as a hub.
4. The POWER LED lights after the device powers up.

원문: MultiTech MultiConnect® microCell 사용설명서(영문) · 제조사 원문 자료입니다. 사양은 제조사 사정에 따라 변경될 수 있습니다.

Mounting Device to Flat Surface

1. Locate the groove on the bottom of the device.
2. Slide the mounting bracket through the groove.
3. To secure the bracket to the desired surface, place and tighten two screws in the holes on either end of the mounting bracket. The dimensions illustration in this guide shows the mounting bracket, as well as the dimensions for placement of the screws.

Troubleshooting the Connection

If the device does not connect to your network:

- Check the SIM card. Verify it is activated and allowed to connect to private LTE network.
- Does SIM card require specific APN setting? Set APN using AT commands.
- Check LED SIM to insure SIM card is detected.
- Check LED signal strength to insure network signal is available.
- Check LED LS to insure network registered.

원문: MultiTech MultiConnect® microCell 사용설명서(영문) · 제조사 원문 자료입니다. 사양은 제조사 사정에 따라 변경될 수 있습니다.

Next Steps

Before using the device:

- Install drivers. Download drivers for your device at https://www.multitech.com/brands/multiconnect-microcell. Select your model to find the drivers specific to your device. Driver documentation for both Linux and Windows is included in the related documentation zip file.
- To communicate with your device, use terminal software such as HyperTerminal, Tera Term, Kermit, or Putty.
- Power up your device and ensure it is connected to your computer that issues AT commands. AT command documents are in the related documentation zip file at https://www.multitech.com/brands/multiconnect-microcell. Select your model to find the zip file for your device.

Note: Wait 10 seconds after power-up before issuing any AT commands.

원문: MultiTech MultiConnect® microCell 사용설명서(영문) · 제조사 원문 자료입니다. 사양은 제조사 사정에 따라 변경될 수 있습니다.

Chapter 5 – Configuring and Communicating with Your Device

Before Using the Device

Before using the device:

- Install any drivers. Refer to the separate driver installation guide for your device.
- Power up your device and ensure it is connected to your computer that issues AT commands.

  Note: Wait 10 seconds after power-up before issuing any AT commands.

- Install terminal software that can communicate with the device, such as HyperTerminal, Tera Term, Kermit, or Putty.

For additional information, refer to the AT command guide and any related documentation for your device. The AT command guide describes command formatting, syntax, and other basic information.

Using Command Mode and Online Data Mode

Modems have two operation modes, command and online data. After power up, the modem is in command mode and ready to accept AT commands.

Use AT commands to communicate with and configure your modem. These commands establish, read, and modify device parameters and control how the modem works. The device also generates responses to AT commands that help determine the modem's current state.

If the modem is in online data mode, it only accepts the Escape command (+++).

To send the modem AT Commands from terminal emulation software, set the software to match the modem's default data format, which is:

- Speed: 115,200 bps
- Data bits: 8
- Parity: none
- Stop bit: 1
- Flow control: hardware

To confirm communication with the device:

- Type **AT** and press **Enter**.

If the device responds with OK, it is properly communicating.

Device Phone Number

Every device has a unique phone number. Your service provider supplies a phone number when you activate your account, or if your device has a SIM card, the phone number may be on it. Wireless service provider implementation may vary. Consult with your service provider to get the phone number for your device.

원문: MultiTech MultiConnect® microCell 사용설명서(영문) · 제조사 원문 자료입니다. 사양은 제조사 사정에 따라 변경될 수 있습니다.

Dual Carrier Firmware for Cellular Radio

This device uses a cellular radio with dual carrier firmware meaning that it can be used on different carrier networks (not simultaneously). The device can be used on either the Verizon or AT&T/other networks. The device is configured for AT&T/others by default. The device is configured for Verizon by default.

To check that your device is configured for the desired network:

```
AT#FWSWITCH?
```

If response is:
`#FWSWITCH: 0`
The device is configured for AT&T/other networks.

If response is:
`#FWSWITCH: 1`
The device is configured for Verizon.

To switch carrier networks:

From AT&T to Verizon:

```
AT#FWSWITCH=1,1
```

From Verizon to AT&T:

```
AT#FWSWITCH=0,1
```

Note: This AT Command reboots the system.

Note: For the Link status (LS) LED to function, you must issue the command AT#GPIO=1,0,2 any time you use the firmware switch command (AT#FWSWITCH=0 or AT#FWSWITCH=1).

Adding APN value

After properly setting up your account with your carrier and activating and installing your SIM card, you need to add your carrier's APN (Access Point Name) into the device before the cellular modem is ready for use.

To add your APN value:

1. Establish a terminal session with the device. If Verizon is your carrier, configure the device for the Verizon network as described in *Dual Carrier Firmware for Cellular Radio*.
2. If you are not on the Verizon network, program your network provider's Access Point Name (APN) into the device. To do this, issue:

   ```
   AT+CGDCONT=1,"IPV4V6","APN_Name"
   ```

   (where APN_Name is the APN provided by your wireless carrier).
   - Your wireless carrier assigns the APN. If you don’t know the APN, contact your wireless carrier.

Your device should now be activated on the carrier’s network and ready for use. To check operation issue the command: AT+CEREG? The modem should respond with +CEREG: 0,1 showing registration.

원문: MultiTech MultiConnect® microCell 사용설명서(영문) · 제조사 원문 자료입니다. 사양은 제조사 사정에 따라 변경될 수 있습니다.

TS-TL-MTC-010

we measure, we calibrate, we validate.
㈜테솔 · www.tessol.com TS-TL-MTC-010 18 / 36
KOLAS 국제공인교정기관 · ISO/IEC 17025

Verizon FOTA (Firmware Over the Air)

At times, your device may require a critical update to radio firmware for devices connecting to the network. To stay compliant to Verizon's LTE requirements, you must implement FOTA. Failure to perform a critical update could result in losing access to the Verizon network.

MultiTech has developed a script for customers to use in order to initiate a FOTA update from the (the customer's) local host processor (pull FOTA). The script is available at: https://www.multitech.com/vzw-catm1

Verifying Signal Strength

To verify the device signal strength, enter:

AT+CSQ

The command indicates signal quality, in the form:

```
+CSQ:     <rssi>,<sq>
```

Where:

<rssi>	Received signal strength indication.
0	(-113) dBm or less
1	(-111) dBm
2-30	(-109) dBm - (-53) dBm / 2 dBm per step
31	(-51) dBm or greater
99	Not known or not detectable
<sq>	LTE - RSRQ (in dBm):
0	-4 to -3
1	-6 to -5
2	-8 to -7
3	-10 to -9
4	-13 to -11
5	-15 to -14
6	-17 to -16
7	-19 to -18
99	Not known or not detectable

Note: Signal strength of 10 or higher is needed for successful packet data sessions.

원문: MultiTech MultiConnect® microCell 사용설명서(영문) · 제조사 원문 자료입니다. 사양은 제조사 사정에 따라 변경될 수 있습니다.

TS-TL-MTC-010

we measure, we calibrate, we validate.
KOLAS 국제공인교정기관 · ISO/IEC 17025
㈜테솔 · www.tessol.com TS-TL-MTC-010 19 / 36

Example

A example response to AT+CSQ:

```
+CSQ: 15,1
```

Checking Network Registration

Before establishing a packet data connection, verify the is device registered on the network. To do this enter the network registration report read command:

```
AT+CEREG?
```

If the device returns:

```
+CEREG: 0,1
```

or

```
+CEREG: 0,5
```

The device is registered.

If the device returns:

```
+CEREG: 0,2
```

The device is in a network searching state.

If the device returns:

```
+CEREG: 0,3
```

The registration is denied.

If the device returns:

```
+CEREG: 0,0
```

The device is not currently attempting to register to a network.

Reading, Writing and Deleting Messages

Reading Text Messages

NOTE: For CAT M1 devices, you can only send/receive SMS messages from other CAT M1 devices on the same network.

To read a text message in text mode:

1. **Send a message to the phone number of the currently installed SIM.**
2. **Put the device in text mode.**
   Enter:
   `AT+CMGF=1`
3. **Read message.**
   Enter:

원문: MultiTech MultiConnect® microCell 사용설명서(영문) · 제조사 원문 자료입니다. 사양은 제조사 사정에 따라 변경될 수 있습니다.

TS-TL-MTC-010

we measure, we calibrate, we validate.
㈜테솔 · www.tessol.com TS-TL-MTC-010 20 / 36
KOLAS 국제공인교정기관 · ISO/IEC 17025

```
AT+CMGR=1
```

Example response:

```
+CMGR: "REC UNREAD","0001112222","","20161006135126"
How are you?
OK
```

Where 0001112222 is the recipient phone number and 20161006135126 is received data in the format YYYYMMDDHHMMSS.

Deleting Messages

To delete one text message, enter:

AT+CMGD=1,#

where 1 is the index in the select storage and # is the delflag option. Enter:

0	Deletes message in the specified index.
1	Deletes all read messages. Leaves unread messages and stored device-originated messages.
2	Deletes all read and sent device-originated messages. Leaves unread messages and unsent device-originated messages.
3	Deletes all read messages and sent and unsent device-orginated messages. Leaves unread messages.
4	Deletes all messages.

For example:

```
AT+CMGD=1 (delete message at index 1)
AT+CMGD=2 (delete message at index 2 )
AT+CMGD=1,0
AT+CMGD=1,1
AT+CMGD=1,2
AT+CMGD=1,3
AT+CMGD=1,4
```


원문: MultiTech MultiConnect® microCell 사용설명서(영문) · 제조사 원문 자료입니다. 사양은 제조사 사정에 따라 변경될 수 있습니다.

we measure, we calibrate, we validate.
KOLAS 국제공인교정기관 · ISO/IEC 17025

Chapter 6 – Antenna Information

Notice regarding Compliance with FCC, EU, and Industry Canada Requirements for RF Exposure

The antenna intended for use with this unit meets the requirements for mobile operating configurations and for fixed mounted operations, as defined in 2.1091 of the FCC rules for satisfying RF exposure compliance. This device also meets the European RF exposure requirements of EN 62311. If an alternate antenna is used, consult user documentation for required antenna specifications.

Compliance of the device with the FCC, EU and IC rules regarding RF Exposure was established and is given with the maximum antenna gain as specified above for a minimum distance of 20 cm between the devices radiating structures (the antenna) and the body of users. Qualification for distances closer than 20 cm (portable operation) would require re-certification.

Wireless devices could generate radiation. Other nearby electronic devices, like microwave ovens, may also generate additional radiation to the user causing a higher level of RF exposure.

Antenna System Cellular Devices

The cellular/wireless performance depends on the implementation and antenna design. The integration of the antenna system into the product is a critical part of the design process; therefore, it is essential to consider it early so the performance is not compromised. Devices were approved with the following antenna(s) and for alternate antennas meeting the given specifications.

The antenna system is defined as the UFL connection point from the device to the specified cable specifications and specified antenna specifications.

Antenna

Devices were approved with the following antenna:

Manufacturer:	Wieson
Description:	LTE Antenna with SMA-Male Connector
Model Number	GY115IE002-001

MultiTech ordering information:

Model	Quantity
ANLTE4-1HRA	1
ANLTE4-2HRA	2
ANLTE4-10HRA	10
ANLTE4-50HRA	50

원문: MultiTech MultiConnect® microCell 사용설명서(영문) · 제조사 원문 자료입니다. 사양은 제조사 사정에 따라 변경될 수 있습니다.

Antenna Specifications

Category	Description
Frequency Range	0.698 - 0.96 GHz 1.710 - 2.170 GHz 2.30 - 2.69 GHz
VSWR	3:1 maximum
Gain	2.06 dBi
Impedance	50Ω nominal
Radiation	Omni-directional
Polarization	Linear, vertical

LTE Antenna MISO

LTE devices use Multiple Input and Single output (MISO) to improve the downlink connection (cell tower to mobile). It has no effect on the uplink (mobile to cell tower).

Important: Always connect all included antennas for increased downlink bandwidth and better signal handling in diverse locations. You must deploy with two antennas, unless your carrier has authorized you to deploy with one antenna.

Selecting Antennas

Select an antenna based on your product and application. Typically, both antennas are the same and either can be the main receive antenna.

Antenna Approvals and Safety Considerations

Note the following:

- Carriers conduct antenna diversity tests.
- There are no EMC concerns about antenna diversity.
- All antennas need to have a minimum flammability rating.
- Safety requirements depend on your final product.
- Unless otherwise noted, antennas certified by MultiTech are not approved for outdoor use. Do not extend these antennas outside of any building.

Power Draw

There are no significant power draw differences.

원문: MultiTech MultiConnect® microCell 사용설명서(영문) · 제조사 원문 자료입니다. 사양은 제조사 사정에 따라 변경될 수 있습니다.

we measure, we calibrate, we validate.
KOLAS 국제공인교정기관 · ISO/IEC 17025
㈜테솔 · www.tessol.com TS-TL-MTC-010 23 / 36

TESSOL Technical Library
TS-TL-MTC-010

Chapter 7 – Regulatory Information

47 CFR Part 15 Regulation Class B Devices

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Warning: Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

FCC Interference Notice

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference, and
2. This device must accept any interference received, including interference that may cause undesired operation.

Industry Canada Class B Notice

This Class B digital apparatus meets all requirements of the Canadian Interference-Causing Equipment Regulations.

Cet appareil numérique de la classe B respecte toutes les exigences du Reglement Canadien sur le matériel brouilleur.

This device complies with Industry Canada license-exempt RSS standard(s). The operation is permitted for the following two conditions:

1. the device may not cause interference, and
2. this device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

1. l'appareil ne doit pas produire de brouillage, et
2. l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

원문: MultiTech MultiConnect® microCell 사용설명서(영문) · 제조사 원문 자료입니다. 사양은 제조사 사정에 따라 변경될 수 있습니다.

TS-TL-MTC-010

we measure, we calibrate, we validate.
KOLAS 국제공인교정기관 · ISO/IEC 17025
㈜테솔 · www.tessol.com TS-TL-MTC-010 24 / 36

Waste Electrical and Electronic Equipment Statement

Note: This statement may be used in documentation for your final product applications.

WEEE Directive

The WEEE Directive places an obligation on EU-based manufacturers, distributors, retailers, and importers to take-back electronics products at the end of their useful life. A sister directive, ROHS (Restriction of Hazardous Substances) complements the WEEE Directive by banning the presence of specific hazardous substances in the products at the design phase. The WEEE Directive covers all MultiTech products imported into the EU as of August 13, 2005. EU-based manufacturers, distributors, retailers and importers are obliged to finance the costs of recovery from municipal collection points, reuse, and recycling of specified percentages per the WEEE requirements.

Instructions for Disposal of WEEE by Users in the European Union

The symbol shown below is on the product or on its packaging, which indicates that this product must not be disposed of with other waste. Instead, it is the user's responsibility to dispose of their waste equipment by handing it over to a designated collection point for the recycling of waste electrical and electronic equipment. The separate collection and recycling of your waste equipment at the time of disposal will help to conserve natural resources and ensure that it is recycled in a manner that protects human health and the environment. For more information about where you can drop off your waste equipment for recycling, please contact your local city office, your household waste disposal service or where you purchased the product.

July, 2005

REACH Statement

Registration of Substances

Multi-Tech Systems, Inc. confirms that none of its products or packaging contain any of the Substances of Very High Concern (SVHC) on the REACH Candidate List, in a concentration above the 0.1% by weight allowable limit

The latest **197** substances restricted per the REACH Regulation were **last updated January 2019**. Refer to the following for the most current candidate list of substances: http://echa.europa.eu/candidate-list-table.

원문: MultiTech MultiConnect® microCell 사용설명서(영문) · 제조사 원문 자료입니다. 사양은 제조사 사정에 따라 변경될 수 있습니다.

Restriction of the Use of Hazardous Substances (RoHS)

Multi-Tech Systems, Inc.

Certificate of Compliance

2015/863

Multi-Tech Systems, Inc. confirms that its embedded products comply with the chemical concentration limitations set forth in the directive 2015/863 of the European Parliament (Restriction of the use of certain Hazardous Substances in electrical and electronic equipment - RoHS 3).

These MultiTech products do not contain the following banned chemicals[1]:

- Lead, [Pb] < 1000 PPM
- Mercury, [Hg] < 100 PPM
- Cadmium, [Cd] < 100 PPM
- Hexavalent Chromium, [Cr+6] < 1000 PPM
- Polybrominated Biphenyl, [PBB] < 1000 PPM
- Polybrominated Diphenyl Ethers, [PBDE] < 1000 PPM
- Bis(2-Ethylhexyl) phthalate (DEHP): < 1000 ppm
- Benzyl butyl phthalate (BBP): < 1000 ppm
- Dibutyl phthalate (DBP): < 1000 ppm
- Diisobutyl phthalate (DIBP): < 1000 ppm

원문: MultiTech MultiConnect® microCell 사용설명서(영문) · 제조사 원문 자료입니다. 사양은 제조사 사정에 따라 변경될 수 있습니다.

Information on HS/TS Substances According to Chinese Standards

In accordance with China's Administrative Measures on the Control of Pollution Caused by Electronic Information Products (EIP) # 39, also known as China RoHS, the following information is provided regarding the names and concentration levels of Toxic Substances (TS) or Hazardous Substances (HS) which may be contained in Multi-Tech Systems Inc. products relative to the EIP standards set by China's Ministry of Information Industry (MII).

Hazardous/Toxic Substance/Elements

Name of the Component	Lead (PB)	Mercury (Hg)	Cadmium (CD)	Hexavalent Chromium (CR6+)	Polybrominated Biphenyl (PBB)	Polybrominated Diphenyl Ether (PBDE)
Printed Circuit Boards	O	O	O	O	O	O
Resistors	X	O	O	O	O	O
Capacitors	X	O	O	O	O	O
Ferrite Beads	O	O	O	O	O	O
Relays/Opticals	O	O	O	O	O	O
ICs	O	O	O	O	O	O
Diodes/ Transistors	O	O	O	O	O	O
Oscillators and Crystals	X	O	O	O	O	O
Regulator	O	O	O	O	O	O
Voltage Sensor	O	O	O	O	O	O
Transformer	O	O	O	O	O	O
Speaker	O	O	O	O	O	O
Connectors	O	O	O	O	O	O
LEDs	O	O	O	O	O	O
Screws, Nuts, and other Hardware	X	O	O	O	O	O
AC-DC Power Supplies	O	O	O	O	O	O
Software /Documentation CDs	O	O	O	O	O	O
Booklets and Paperwork	O	O	O	O	O	O
Chassis	O	O	O	O	O	O

X Represents that the concentration of such hazardous/toxic substance in all the units of homogeneous material of such component is higher than the SJ/Txxx-2006 Requirements for Concentration Limits.
O Represents that no such substances are used or that the concentration is within the aforementioned limits.

원문: MultiTech MultiConnect® microCell 사용설명서(영문) · 제조사 원문 자료입니다. 사양은 제조사 사정에 따라 변경될 수 있습니다.

Information on HS/TS Substances According to Chinese Standards (in Chinese)

依照中国标准的有毒有害物质信息

根据中华人民共和国信息产业部 (MII) 制定的电子信息产品 (EIP) 标准—中华人民共和国《电子信息产品污染控制管理办法》（第 39 号），也称作中国 RoHS, 下表列出了 Multi-Tech Systems, Inc. 产品中可能含有的有毒物质 (TS) 或有害物质 (HS) 的名称及含量水平方面的信息。

有害/有毒物质/元素

成分名称	铅 (PB)	汞 (Hg)	镉 (CD)	六价铬 (CR6+)	多溴联苯 (PBB)	多溴二苯醚 (PBDE)
印刷电路板	O	O	O	O	O	O
电阻器	X	O	O	O	O	O
电容器	X	O	O	O	O	O
铁氧体磁环	O	O	O	O	O	O
继电器/光学部件	O	O	O	O	O	O
ICs	O	O	O	O	O	O
二极管/晶体管	O	O	O	O	O	O
振荡器和晶振	X	O	O	O	O	O
调节器	O	O	O	O	O	O
电压传感器	O	O	O	O	O	O
变压器	O	O	O	O	O	O
扬声器	O	O	O	O	O	O
连接器	O	O	O	O	O	O
LEDs	O	O	O	O	O	O
螺丝、螺母以及其它五金件	X	O	O	O	O	O
交流-直流电源	O	O	O	O	O	O
软件/文档 CD	O	O	O	O	O	O
手册和纸页	O	O	O	O	O	O
底盘	O	O	O	O	O	O

X 表示所有使用类似材料的设备中有害/有毒物质的含量水平高于 SJ/Txxx-2006 限量要求。
O 表示不含该物质或者该物质的含量水平在上述限量要求之内。

원문: MultiTech MultiConnect® microCell 사용설명서(영문) · 제조사 원문 자료입니다. 사양은 제조사 사정에 따라 변경될 수 있습니다.

we measure, we calibrate, we validate.
KOLAS 국제공인교정기관 · ISO/IEC 17025
㈜테솔 · www.tessol.com TS-TL-MTC-010 28 / 36

Chapter 8 – Using Connection Manager

Use Connection Manager to:

- Install the latest device drivers.
- Connect your device to your carrier's network.

Note:

- Connection Manager can install drivers and connect your device regardless of your cellular network; however, activation is only supported with Verizon, Aeris, and some regional carriers. If you cannot activate your device with Connection Manager, refer to *Account Activation for Cellular Devices.*

- Switch the firmware in your device to a different carrier (if supported by your device).
- Manage cellular connection and automatically reconnect with the keep-alive feature.
- View device details.
- View line charts of signal level and data rates.
- Use a terminal window for communicating with and troubleshooting the device.

Installing Connection Manager

Connection Manager installs the appropriate drivers for USB devices along with the application. Serial devices do not require drivers.

Note: Attempting to plug in the device before the appropriate drivers are installed can cause the connection to fail.

To install Connection Manager and the device drivers:

1. Go to https://www.multitech.com/support/connection-manager.
2. Click **Connection Manager**.
3. Open or unzip the **Connection Manager** file and run the installer (.msi file).
4. In the MultiTech Connection Manager Setup Wizard, read the end-user license agreement and check **I accept the terms in the License Agreement**.
5. Click **Next** to have the installer automatically disable the native WWAN AutoConfig service in Windows.

   The WWAN AutoConfig service manages mobile broadband connections. Connection Manager requires that this service be disabled.

   Note: This page appears only on Windows 10.

6. If a MultiTech device is connected to the computer, disconnect it and click **Next**.
7. If you use a USB device, check **Install the modem driver**.

   CAUTION: Unless you are certain that the drivers for your USB device are already installed on the computer, make sure that you check **Install the modem driver**. Failure to do this will cause the application to incorrectly detect your device or not detect the device at all.

   Note: Because serial devices do not require drivers, it does not matter if you check or uncheck **Install the modem driver** for a serial device.

8. To specify a folder for Connection Manager, use the default folder or click **Change** to browse to the folder you want to use.

원문: MultiTech MultiConnect® microCell 사용설명서(영문) · 제조사 원문 자료입니다. 사양은 제조사 사정에 따라 변경될 수 있습니다.

TESSOL Technical Library

TS-TL-MTC-010

we measure, we calibrate, we validate.
㈜테솔 · www.tessol.com TS-TL-MTC-010 29 / 36
KOLAS 국제공인교정기관 · ISO/IEC 17025

9. Click **Install**.

   A separate wizard opens for installing Telit drivers. Some MultiTech devices use embedded modules from Telit Wireless Solutions to provide cellular connectivity; these devices require Telit drivers.

10. Select **Complete** setup type.
11. When the drivers are installed, click **Finish**.
12. In the Setup Wizard, click **Finish**.

Note:

- To open Connection Manager after installation, check **Start the MultiTech Connection Manager when the installation is finished**.
- After the drivers are installed, you need to restart your computer if prompted by Windows.

If using a USB device, you can connect the device to the carrier's network with Connection Manager. Refer to Connecting a Device.

If using a serial device, you need to set up the device in Windows Device Manager before connecting the device. Refer to Setting Up a Serial Device in Windows Device Manager.

Setting Up a Serial Device in Windows Device Manager

To set up the device in Windows Device Manager:

1. Make sure that your desired COM port for the serial device is available.
2. Connect the serial device to the PC.
3. Go to **Control Panel** > **Device Manager**. Make a note of the COM port number for the connected device (in **COM Ports**).

   Example: The COM port is **COM31**.

4. Go to **Action** > **Add legacy hardware**.

원문: MultiTech MultiConnect® microCell 사용설명서(영문) · 제조사 원문 자료입니다. 사양은 제조사 사정에 따라 변경될 수 있습니다.

we measure, we calibrate, we validate.
㈜테솔 · www.tessol.com TS-TL-MTC-010 30 / 36
KOLAS 국제공인교정기관 · ISO/IEC 17025

TESSOL Technical Library
TS-TL-MTC-010

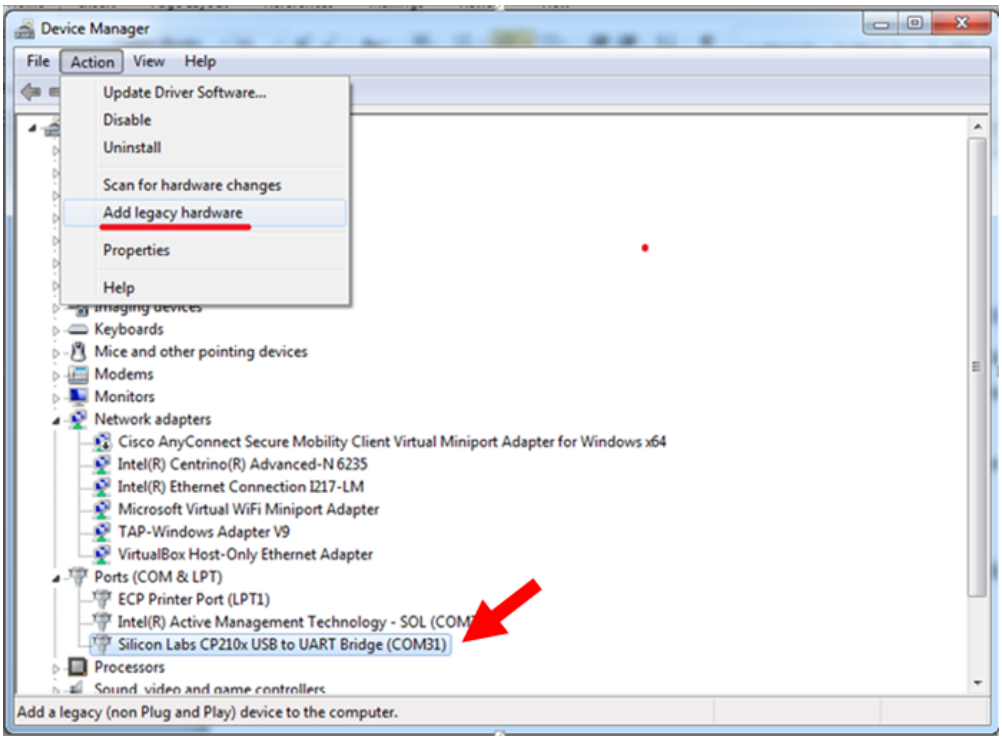

5. In the **Add Hardware Wizard**:
   a. Click **Next**.
   b. Select **Install the hardware that I manually select from a list**, then click **Next**.
   c. Select **Modems**, then click **Next**.
   d. Check **Don't detect my modem; I will select it from a list**, then click **Next**.
   e. Select **Standard Modem Types**, then select **Standard 33600 bps Modem** on the right.

      Important: Make sure that you select *only* **Standard 33600 bps Modem**. Selecting another model may cause your device to work incorrectly or fail.

   f. Select your COM port, then click **Next**.
   g. Click **Finish**.
   h. Go to **Device Manager** > **Modems** and confirm that the device is added.
6. To verify that the device is set up correctly, query the device:
   a. Go to **Device Manager** > **Modems**, right-click **Standard 33600 bps Modem**, and select **Properties**.
   b. On the **Diagnostics** tab, click **Query Modem**.

      Note: The device cannot be queried if the Connection Manager is running and using the device's port.

If the device is ready, diagnostic information from the device appears in the box above.

To connect the device to your carrier's network, refer to Connecting a Device.

원문: MultiTech MultiConnect® microCell 사용설명서(영문) · 제조사 원문 자료입니다. 사양은 제조사 사정에 따라 변경될 수 있습니다.

Connecting a Device

Before You Begin

- Make sure that your device is connected to the computer where Connection Manager is installed.
- Set up the device in Device Manager. Refer to Setting Up a Serial Device in Windows Device Manager.

To connect your device to the carrier's network:

1. Open Connection Manager.

   Connection Manager automatically detects the connected device, and the **Detect** button on the **Main** tab changes to **Connect**. If the application cannot detect the device automatically, click **Detect** to initiate device detection manually.

2. If you are connecting the device to this computer for the first time, on the **Connection** dialog box, provide values for the connection settings, such as the dial number and access point name (APN).

   You may need to ask the carrier for these settings.

   a. To monitor Internet connectivity, have Connection Monitor send periodic pings to a host, check **Enable keep-alive** and enter the IP address or host name to ping in the **Host to ping** box. For example, you can enter the host name google.com or IP address **8.8.8.8**.

      If the keep-alive check fails, Connection Manager automatically reconnects. When the keep-alive feature is enabled, the Connection Manager's **Main** tab displays the keep-alive check status and when the last ping response was received.

   b. If your device supports dual carriers, switch the firmware to the desired carrier by selecting the carrier in the **MNO Firmware** list. For example, if your device can switch the firmware between AT&T and Verizon, select **Verizon** in the list.

      Note:

      - The **MNO Firmware** list doesn't appear if your device doesn't support carrier firmware switching.
      - When you change the carrier firmware, the modem automatically restarts to apply the selected firmware.

   c. To save the settings, click **Apply**.

      You can change the connection settings on the **Connection** tab. The **Dial number**, **APN**, **User name**, and **Password** cannot be changed after the device is connected.

3. On the **Settings** tab, select **USB Modem** or **Serial Modem** depending on whether you are connecting a USB or serial device.
4. If you are connecting a serial device, provide the serial settings on the **Settings** tab:

   a. In the **Modem type** list, select the appropriate modem type.

   b. For the other settings, provide the values that match the serial-port settings for the device in Device Manager.

      For **Port**, expand **Ports** and notice the COM port number next to the device name. Right-click the device name, select **Properties**, and find the values for the other settings on the **Port Settings** tab.

   c. To save the settings, click **Apply**.

Note:

원문: MultiTech MultiConnect® microCell 사용설명서(영문) · 제조사 원문 자료입니다. 사양은 제조사 사정에 따라 변경될 수 있습니다.

we measure, we calibrate, we validate.
㈜테솔 · www.tessol.com TS-TL-MTC-010 32 / 36
KOLAS 국제공인교정기관 · ISO/IEC 17025

TESSOL Technical Library
TS-TL-MTC-010

- Settings displayed for a USB device on the **Settings** tab are determined automatically and cannot be changed.
- To set the application to run during Windows startup, check **Run application at Windows startup**.
- To automatically connect to the Internet, check **Connect to the Internet automatically**.

Selecting **Run application at Windows startup** and **Connect to the Internet automatically** is useful in scenarios where Connection Manager is running on a remote computer. If a power failure occurs on the computer, these settings ensure the application will restart and reconnect to the Internet when power is restored.

5. On the **Main** tab, click **Connect**.

   When a connection is established, the **Main** tab displays the download and upload speeds, the amount of traffic sent and received, **Connected** status, and the signal strength percentage and bars. The statistics on connection speeds and traffic are available only during a current connection session.

Note:

- For serial modems, the signal strength is available only when the device is *not* connected to the carrier's network. When connection to the network is established, the last signal strength value is displayed.
- View the details for the current connection on the **Details** tab.

6. To disconnect the device from the carrier's network, click **Disconnect**.

Uninstalling Connection Manager

Along with uninstalling Connection Manager, the installed device drivers are also removed.

Before You Begin

Make sure that Connection Manager is not running.

To uninstall Connection Manager:

1. In Windows, go to **Control Panel > Programs > Programs and Features**.
2. Right-click **MultiTech Connection Manager** and select **Uninstall**.
3. Click **Yes** to confirm that you want to uninstall Connection Manager.

   The native Windows WWAN AutoConfig service is automatically enabled.

4. When the message "Are you sure you want to uninstall this product?" appears, click **Yes**.

Connection Manager and the installed drivers are removed from the computer.

Note: The steps above describe how to uninstall Connection Manager using Control Panel. You can also uninstall the application by using the installer file (.msi). Double-click the file, in the MultiTech Connection Manager Setup Wizard, click **Next**, and then select **Remove** on the next two pages.

Connection Manager User Interface

Connection Manager consists of the following tabs:

- Main
- Settings

원문: MultiTech MultiConnect® microCell 사용설명서(영문) · 제조사 원문 자료입니다. 사양은 제조사 사정에 따라 변경될 수 있습니다.

we measure, we calibrate, we validate.
㈜테솔 · www.tessol.com TS-TL-MTC-010 33 / 36
KOLAS 국제공인교정기관 · ISO/IEC 17025

TESSOL Technical Library
TS-TL-MTC-010

- Connection
- Details
- Terminal
- Charts

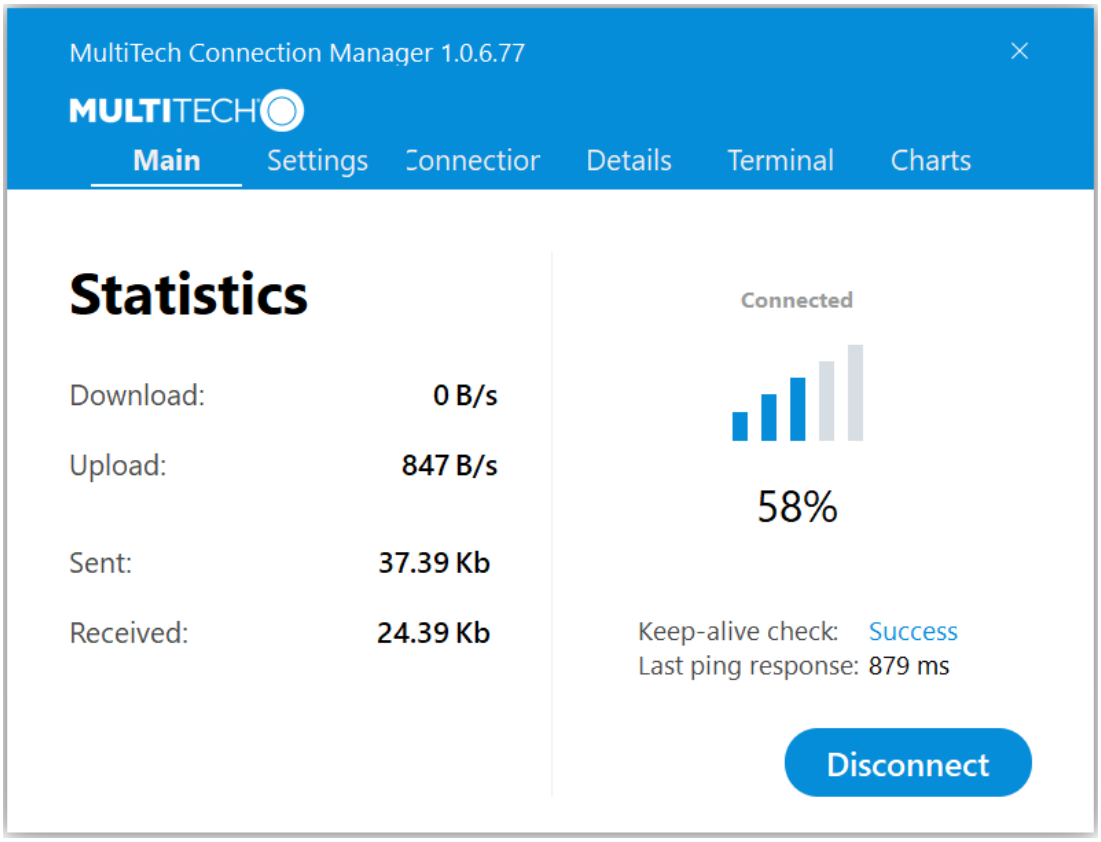

Main tab

The **Main** tab displays the following:

- Status of device connection: Searching, Connecting, Connected, Disconnecting, or Disconnected
- The action button, which changes according to the current device connection status: **Detect**, **Connect**, or **Disconnect**
- Signal strength bars and percentage indicator (only when connection to the carrier's network is established)

  Note: The signal strength is displayed for a serial device only when the device is not connected to the carrier's network.

- Connection statistics: download and upload speeds, amount of traffic sent and received (only when connection to the carrier's network is established)
- The keep-alive check status and when the last ping response was received if **Enable keep-alive check** is checked on the **Connection** tab.

원문: MultiTech MultiConnect® microCell 사용설명서(영문) · 제조사 원문 자료입니다. 사양은 제조사 사정에 따라 변경될 수 있습니다.

TESSOL Technical Library TS-TL-MTC-010

we measure, we calibrate, we validate.
KOLAS 국제공인교정기관 · ISO/IEC 17025
㈜테솔 · www.tessol.com TS-TL-MTC-010 34 / 36

Settings tab

Use the **Settings** tab to specify the type of device: **USB Modem** or **Serial Modem**.

- If **USB Modem** is selected, the tab displays USB settings. These settings cannot be edited.
- If **Serial Modem** is selected, the tab displays the serial settings that match the serial-port settings for the device. You can edit these settings.

The **Settings** tab also contains the **Run application at Windows startup** and **Connect to the Internet automatically** options.

- Check **Run application at Windows startup** to open Connection Manager when Windows starts.
- Check **Connect to the Internet automatically** to set Connection Manager to connect to the carrier's network automatically each time the application opens.

Connection tab

The **Connection** tab displays the following:

- The carrier-provided connection settings.
- The **Enable keep-alive check** box. Check this box to monitor connectivity to the Internet. Check **Enable keep-alive check** and enter the IP address or host name to ping in the **Host to ping** box. Connection Monitor will send periodic pings to the host. If the keep-alive feature fails, Connection Manager will automatically reconnect.
- The **MNO firmware** list. If your device supports dual carriers, you can switch the firmware to the other carrier by selecting the carrier in this list.

  Note: The **Connection** tab isn't available if Connection Manager doesn't detect a device.

Details tab

The **Details** tab displays the modem details when a device is detected and the connection details when a connection is established.

Terminal tab

The **Terminal** tab contains a terminal window to communicate with the connected device by entering AT commands. For details, refer to the AT Commands reference guide for your device.

Note: When a serial device is connected to the carrier's network, the terminal window isn't available.

Charts tab

The **Charts** tab contains line charts that graphically represent signal strength and download and upload speeds for the 2-hour interval.

Troubleshooting

Serial COM port is not available in the Serial Modem Settings

Close Connection Manager and reopen it.

Device is not detected ("No Device")

After following the steps to activate your device, the **Main** tab still indicates "No Device."

원문: MultiTech MultiConnect® microCell 사용설명서(영문) · 제조사 원문 자료입니다. 사양은 제조사 사정에 따라 변경될 수 있습니다.

we measure, we calibrate, we validate.
KOLAS 국제공인교정기관 · ISO/IEC 17025
㈜테솔 · www.tessol.com TS-TL-MTC-010 35 / 36

TESSOL Technical Library
TS-TL-MTC-010

Try the following steps:

1. Click the **Settings** tab and make sure that the appropriate modem type is selected: USB or Serial.
2. If you are connecting a serial device, make sure that all serial modem settings correspond to the serial modem and serial port configuration.
3. Restart Connection Manager.
4. Disconnect and reconnect the device.

MultiConnect Cell USB Modem is not detected

1. Check the LS LED and Power LED (if available) on the device.

   If they are not continuously lit, then the problem is with the power supply. Check the cable and connections.

   If the LS LED is not blinking, then the problem is with the power supply. Check the cable and connections.
2. USB device: Make sure that the device is connected to the PC and that the correct USB cable is in use.

Connection Manager is not working, and a device connected to the computer is not detected

Connection Manager cannot detect a connected device because the required drivers are not installed. The most likely cause is that **Install the modem drivers** was not checked during the installation.

Uninstall and re-install Connection Manager. During the installation, make sure that you check **Install the modem driver**. Refer to Uninstalling Connection Manager and Installing Connection Manager.

Connection Manager displays "Device Error" status for a serial device

This error has the following causes and solutions.

Cause	Solution
Connection Manager cannot open the COM port that the device was installed on because the port is being used by another program.	If possible, free up the COM port for the device.
The wrong COM port is specified for the device on the **Settings** tab.	On the **Settings** tab, select the COM port that matches the port that the device is installed on and click **Apply**. You can look up the port in Device Manager in Windows. In Device Manager, expand **Modems**, right-click the name of your device, and select **Properties**. Note the port on the **Modem** tab.

원문: MultiTech MultiConnect® microCell 사용설명서(영문) · 제조사 원문 자료입니다. 사양은 제조사 사정에 따라 변경될 수 있습니다.

TS-TL-MTC-010

we measure, we calibrate, we validate.
KOLAS 국제공인교정기관 · ISO/IEC 17025

㈜테솔 · www.tessol.com TS-TL-MTC-010 36 / 36